




The Best Way To Automate Your Process

On/Off & Modulating Heavy Industrial Electric Actuators

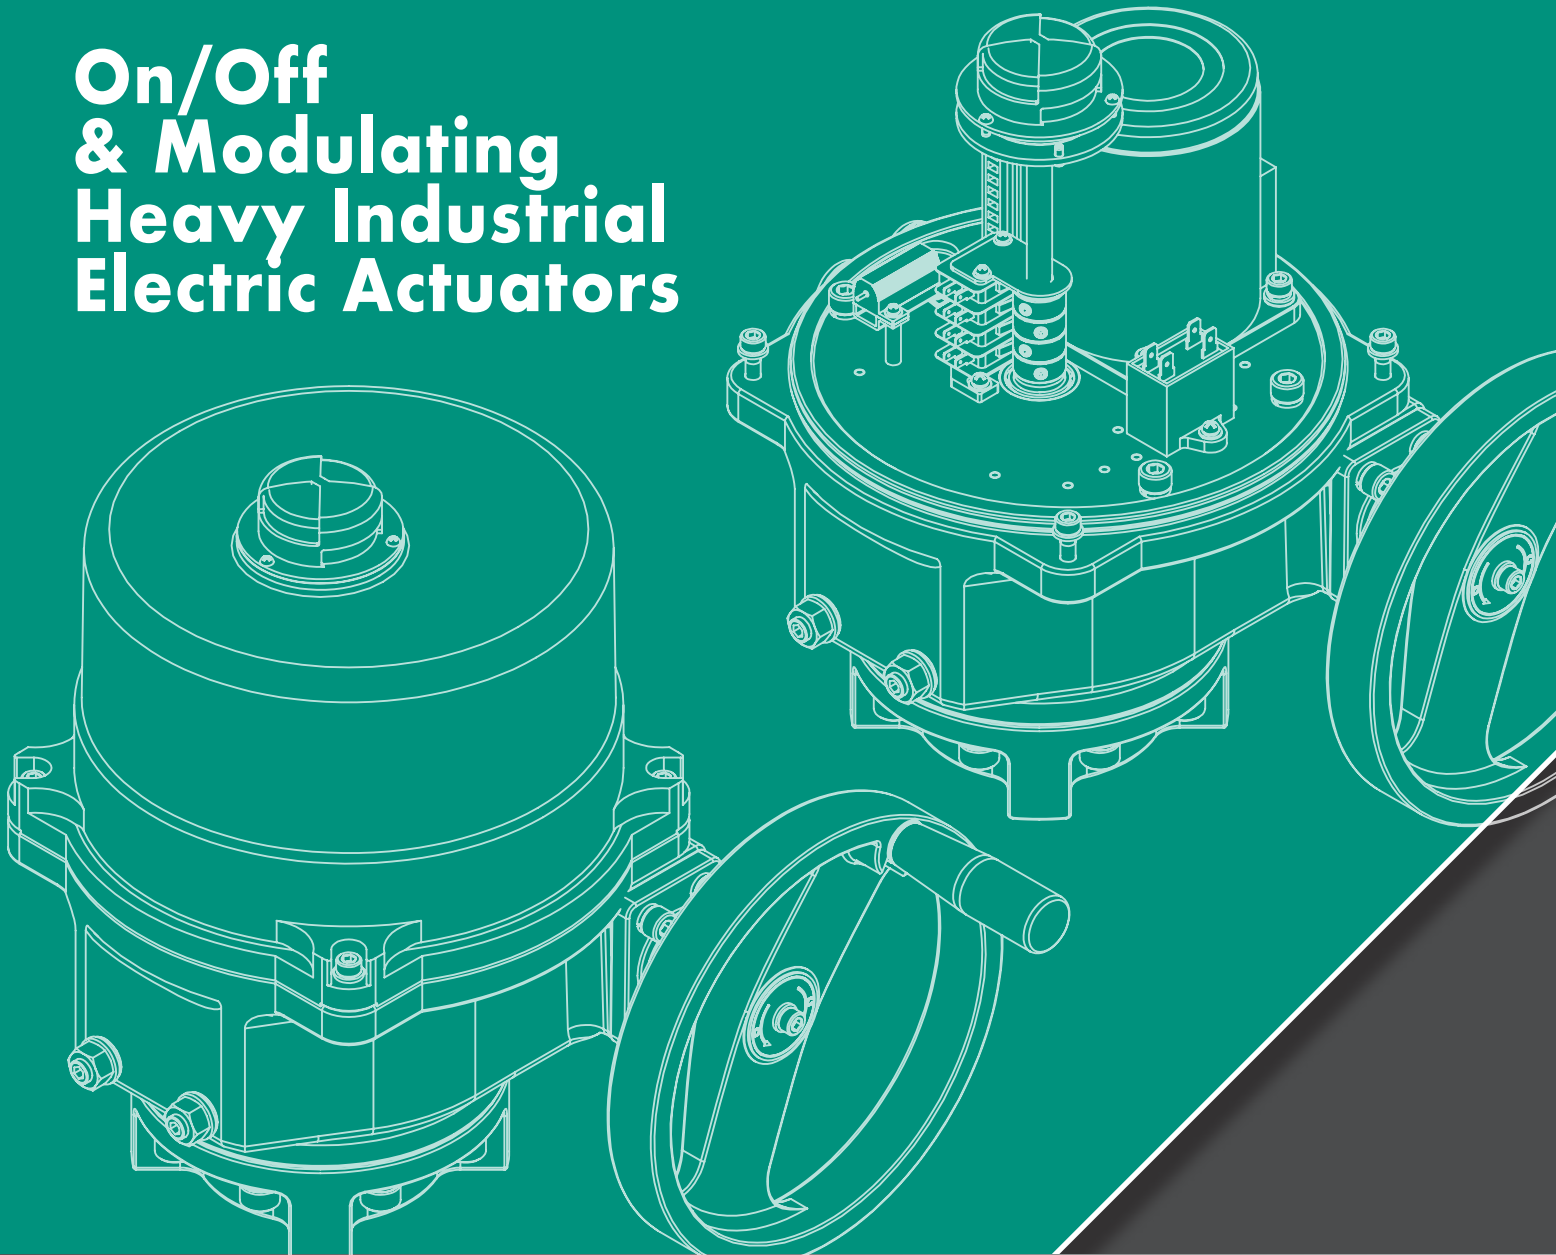


ME Series Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions

Max-Air Technology, Inc. • 114 Resource Drive • Wentzville, MO 63385 • United States of America
Tel +1.636.272.4934 • Toll Free 888.842.9998 • Fax 636.272.4937 • www.maxairtech.com • info@maxairtech.com

ME Series Electric Actuators

Standard On/Off & Modulating, for Heavy Industrial Applications.

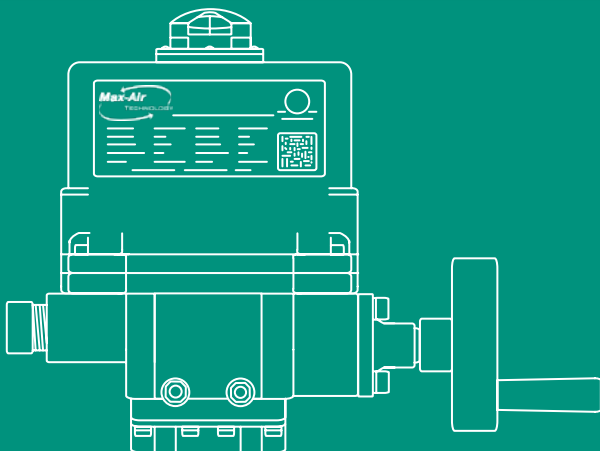

ME Series industrial electric actuators come standard with a heavy duty, NEMA 4/4X/IP67 aluminum enclosure, 3D position indicator, auxiliary limit switches, and internal heater. ME Series actuators are available in 120VAC or dual voltage 24VAC/24VDC models for On/Off/Jog or Modulating control. Additional voltages and customizations also available.

ME Series Part Number Builder



A - SERIES

MES = Electric, On/Off/Jog
MEC = 2 Pos Relay Close
MEO = 2 Pos Relay Open
MEM = Electric, 4-20mA In/Out
MEV = Electric, 2-10vdc In/Out
MET = 0°-45°-90° Control
MEE = 0°-90°-180° Control

B - SIZE

15 = 266 in-lbs
22 = 310 in-lbs
23 = 440 in-lbs

INCLUDES HANDWHEEL OVERRIDE

22H = 310 in-lbs
23H = 440 in-lbs
32H = 880 in-lbs
33H = 1,770 in-lbs
42H = 3,540 in-lbs
43H = 5,310 in-lbs
44H = 7,080 in-lbs
45H = 8,850 in-lbs
46H = 15,040 in-lbs
47H = 20,350 in-lbs
52H = 30,970 in-lbs
53H = 44,250 in-lbs
62H = 70,800 in-lbs
72H = 115,000 in-lbs
73H = 140,000 in-lbs
74H = 177,000 in-lbs

C - VOLTAGE

AUTO = 24~265VAC/VDC
(Size 15 ONLY)
12VD = 12vdc
12AD = 12vac/vdc
12VA = 12vac
24VD = 24vdc
24AD = 24vac/vdc
24VA = 24vac
120A = 120/1 60Hz
230A = 230/1 60Hz

3-PHASE OPTIONS

(See list to the right)
2303 = 230/3/60Hz
3803 = 380/3/60Hz
4803 = 480/3/60Hz
5753 = 575/3/60Hz

D - OPTIONS 1 & 2

(3-Phase Options Covered Below)
(Omit) = None
TS = Torque Switches
ED = Extended Duty
20 = Internal Battery BU
T2 = Torque Switches
Internal Battery BU
30 = Internal Supercap BU
TE = Torque Switches
Extended Duty

3-PHASE OPTIONS

(3-Phase must include ONE of these options)

TR1 = On/Off Only, Torque Switches
use w/ existing Motor Control Center
TM3 = On/Off/Mod, Torque Switches
stand alone, Full Motor Control Center
TM4 = On/Off/Mod, Torque Switches
Motor Control Center w/ Local Control Station
IP65 Round Knob/Key Type
TM5 = On/Off/Mod, Torque Switches
Motor Control Center w/ Local Control Station
IP67 Round Knob/Key Type
TM6 = On/Off/Mod, Torque Switches
Motor Control Center w/ Local Control Station
IP67 Rectangular LED Display
TM7 = On/Off/Mod, Torque Switches
Motor Control Center w/ Local Control Station
IP67 Rectangular LCD Display

E - LOCAL CONTROL STATION OPTION

(3-Phase Options Covered Below)
(Omit) = None
K = IP65 Round Knob/Key Type
B = IP67 Round Knob/Key Type
L = IP67 Rectangular LED Display
D = IP67 Rectangular LCD Display

Temperature Range:

Seals	Temperature Range
Standard	-22°F (-30°C) to 158°F (70°C)



ME Series Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions



Table of Contents

Pg - Description

[02 - Part Number Builder](#)

[03 - Table of Contents](#)

[04 - Features & Benefits](#)

[06 - Exploded View & Bill of Materials](#)

[07 - Technical Data](#)

[26 - Dimensions & Wiring Diagrams](#)



STANDARD WARRANTY

Max-Air Technology Inc. | The Best Way to Automate Your Process

Max-Air Technology provides the following warranty regarding products manufactured by it. **THE WARRANTY STATED HEREIN IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES AND REPRESENTATIONS, EXPRESSED OR IMPLIED, OR STATUTORY, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE.** Max-Air Technology warrants its products to be free from defects in materials and workmanship when these products are used for the purpose for which they were designed and manufactured. Max-Air Technology does not warrant its products against chemical or stress corrosion or against any other failure other than from defects in materials or workmanship. The warranty period is for twelve (12) months from installation date or eighteen (18) months from shipment date, whichever date comes first. Any claims regarding this warranty must be in writing and received by Max-Air Technology before the last effective date of the warranty period. Upon Max-Air Technology's receipt of a warranty claim, Max-Air Technology reserves the right to inspect the product(s) in question at either the field location or at the Max-Air Technology Manufacturing plant. If, after inspection of the product(s) in question, Max-Air Technology determines that the purchaser's claim is covered by this warranty, Max-Air Technology's sole liability and the purchaser's sole remedy under this warranty is limited to the refunding of the purchase price or repair or replacement thereof at Max-Air Technology option. Max-Air Technology will not be liable for any repairs, labor, material or other expenses that are not specifically authorized in writing by Max-Air Technology, and in no event shall Max-Air Technology be liable for any direct or consequential damages arising out of any defect from any cause whatsoever. If any Max-Air Technology product is modified or altered at any location other than Max-Air Technology – St. Louis (Missouri) UNITED STATES or Max-Air Technology – Agrate Brianza (MB) ITALY without the express written authorization of Max-Air Technology, said product is not covered by this warranty. The warranty for such products shall be subject only to the warranty relief, if any, provided by the suppliers and/or manufacturers of such products.

Features & Benefits

Standard On/Off & Modulating, for Heavy Industrial Applications.

Heavy Industrial On/Off & Modulating Electric Actuators

Our electric actuators are designed to provide years of service in light duty and demanding industrial environments such as chemical processing, waste and water treatment, power generation, oil & gas, marine, mining and building services.

Industrial grade actuator with heavy duty NEMA 4/4X/IP67 aluminum enclosure, standard auxiliary feedback switches, internal heater and 3D position indication. Handwheel override standard on most models, and optional torque limit switches available.

Standard Features:

- NEMA 4/4X/IP67 Enclosure
- Raised Position Indicator
- ISO5211 Compliant Mounting
- Internal Low Power Heater
- Clutchless Manual Override
- Self-Locking Drive
- Permanently Lubricated
- Thermally Protected Motor
- 2 Auxiliary Switches
- Silicone Fre



Locations	Ordinary, NEMA 4/4x
Torque Range	Up to 177,000 in-lbs
Materials	Aluminum Base/Poly Lid, Aluminum Lid
Ambient Temp. Range	-14°F to 140°F Standard (AE Series) -22°F to 158°F Standard (ME Series)
Rotation	90 Degrees

Power Supply	120 VAC, 24VAC/VDC, 12VDC, 220VAC, 3-Phase, & More
Signal Type	On/Off or Modulating (4-20mA, 2-10v)
Mounting	ISO 5211
Available Options	Handwheel, Torque Limit Switches, 3 Position Control

AE Series & ME Series Compared

Start from the top of the chart and work down to select the correct Electric Actuator Series.

Service	Light Duty (Indoor or Covered)			Heavy Duty (Indoor/Outdoor)			
	Ordinary			Ordinary			
Electrical Classification	Ordinary			Ordinary			
Temperature	Standard			Standard			
Recommended Series/Options	AE Series			ME Series			
Power Supply	AC	DC	AC/DC	AC	DC	AC/DC	3-Phase
Available Options	180° On/Off			Handwheel Torque Limit Switches 3-Position Control 180° On/Off (On Select Models) Battery Backup Local Control			



ME Series

Industrial grade actuator with heavy duty NEMA 4/4X/IP67 aluminum enclosure, standard auxiliary feedback switches, internal heater and 3D position indication. Handwheel override standard on most models, and optional torque limit switches available.



AE Series


Compact, light duty actuator for shutoff or proportional control with standard auxiliary feedback switches, internal heater and LED position indication. Optional extended duty or fast acting models available.

ME Series Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions



maxairtech.com

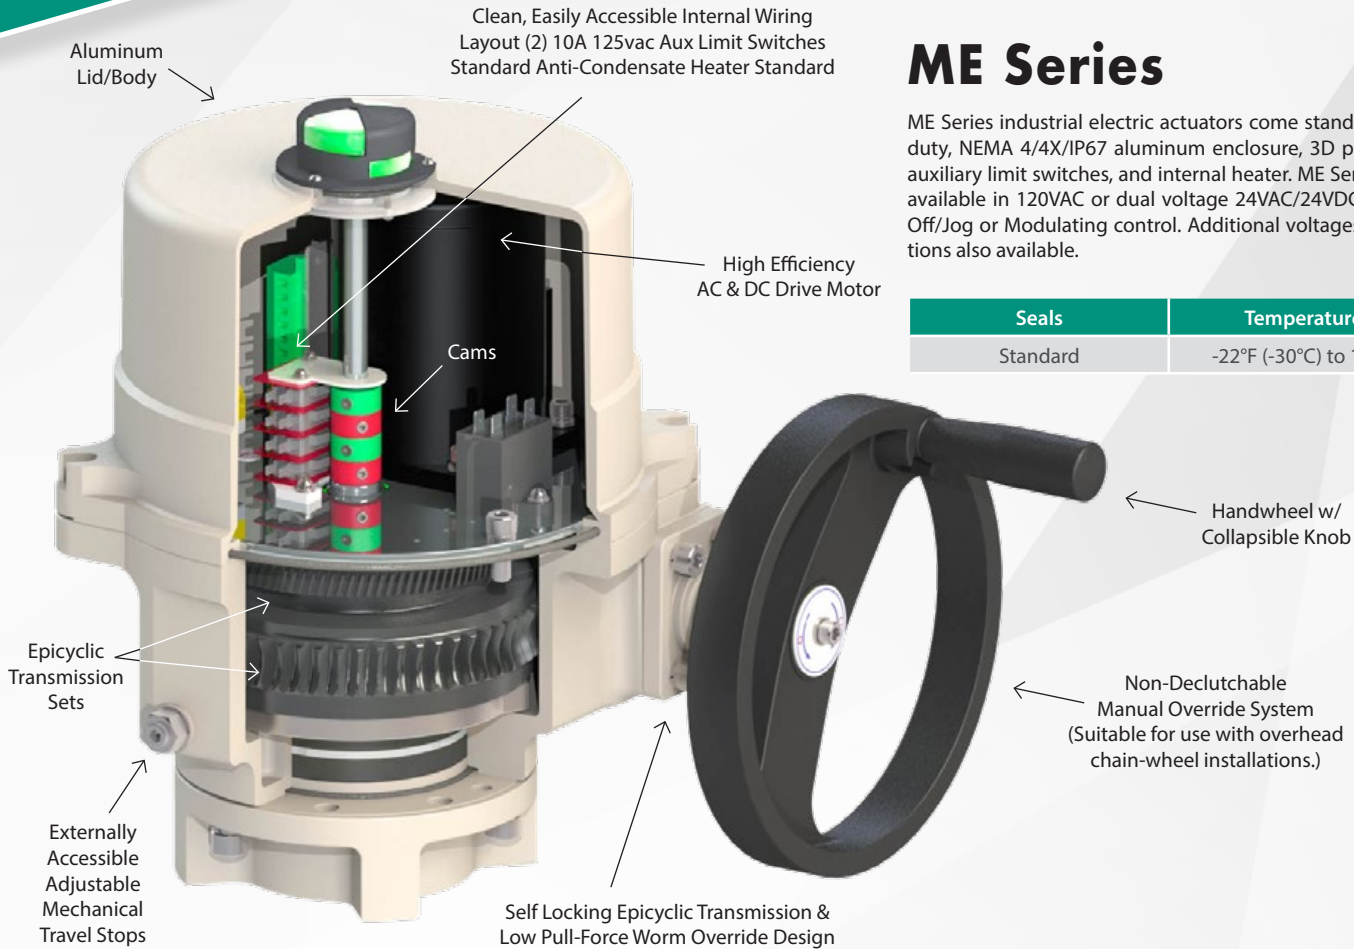

ME Series

ME Series industrial electric actuators come standard with a heavy duty, NEMA 4/4X/IP67 aluminum enclosure, 3D position indicator, auxiliary limit switches, and internal heater. ME Series actuators are available in 120VAC or dual voltage 24VAC/24VDC models for On/Off/Jog or Modulating control. Additional voltages and customizations also available.

Seals	Temperature Range
Standard	-22°F (-30°C) to 158°F (70°C)



ISO Mounting flange

The bottom of the ME actuators are machined to meet ISO5211 standards. On the ME32H-ME33H up through the ME42H-ME47H, should a different flange pattern be needed, these models can be fitted with available flanges without any affect on actuator performance. Contact Max-Air for available ISO compliant flanges.




Interchangeable Bushing

ME series actuators are supplied with ISO5211 compliant double-square drive sockets. On the ME32H-ME33H up through the ME42H-ME47H, the drive socket is removable and can be fitted with a different size or a different shape female drive socket. Available patterns include square, double square, double D and round keyed shafts. Contact Max-Air for available splined drive inserts.



Epicyclic Drive Transmission

Highly efficient, compact transmission technology provides unmatched multiplication of motor torque compared to spur geartrain type systems. Additionally, the final drive output utilizes worm gear geometry to provide self-locking gearsets without any type of braking required to hold the connected device in position. This technology also allows a manual override system which does not require any type of declutching mechanism.



Color Coded Cam System


Easily accessible travel and auxiliary switch cams are color coded to provide instant recognition of the CW or CCW cams when making stroke adjustments. Cam positions are easily changed by utilizing 2.5mm setscrews across the entire ME range of actuators.

Torque Data

Torques, Explanation of Sizing, Operation, & Spring Configuration

ME Series Electric Actuators

EXPLODED VIEW (TYPICAL, 880 in-lb shown)

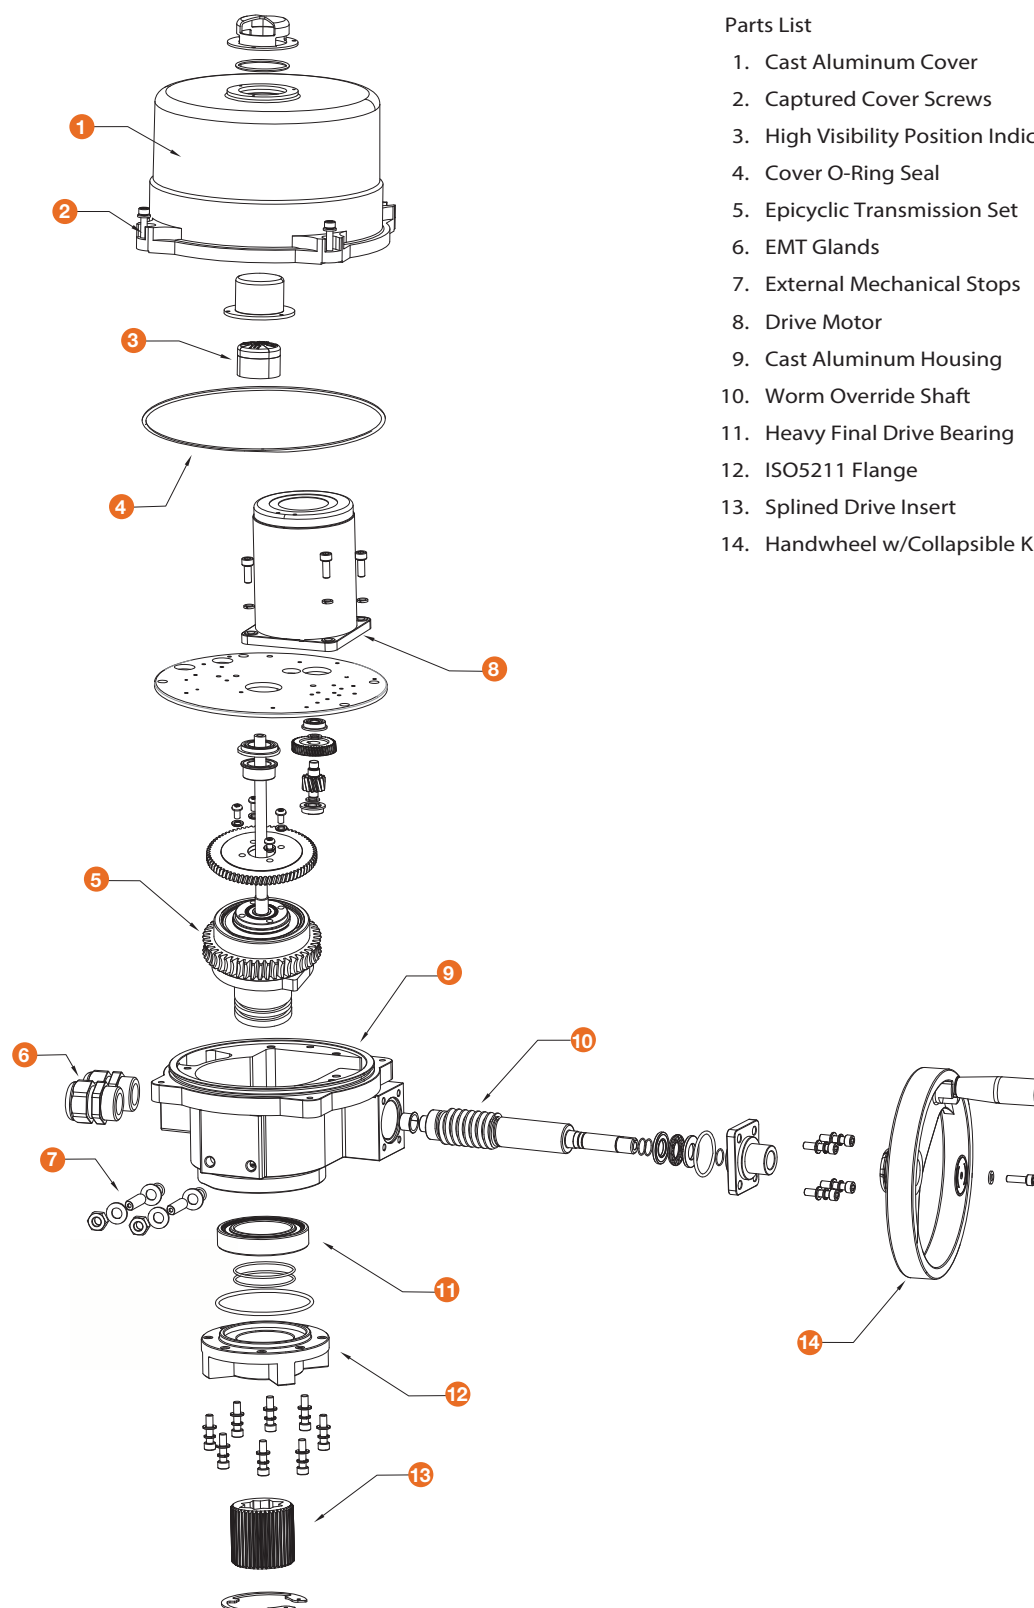

Parts List

1. Cast Aluminum Cover
2. Captured Cover Screws
3. High Visibility Position Indicator
4. Cover O-Ring Seal
5. Epicyclic Transmission Set
6. EMT Glands
7. External Mechanical Stops
8. Drive Motor
9. Cast Aluminum Housing
10. Worm Override Shaft
11. Heavy Final Drive Bearing
12. ISO5211 Flange
13. Splined Drive Insert
14. Handwheel w/Collapsible Knob

ME Series Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions



maxairtech.com

Voltages by Control Type

Type	12/24VDC	12/24VAC/VDC	12/24VAC	120/230VAC	3 PHASE
MES		X		X	X
MEC	X		X	X	X
MEO	X		X	X	X
MEM		X		X	X
MEV		X		X	X
MET	X		X	X	
MEE	X		X	X	

Voltages by Control Type

Frame Size	Torque	12VAC/VDC	24VAC/VDC	120/230VAC	230/3, 380/3,	TS Optional	TS Standard
15	266 in-lbs		X	X			
22	310 in-lbs	X	X	X			
22H	310 in-lbs	X	X	X			
23	440 in-lbs	X	X	X			
23H	440 in-lbs	X	X	X			
32H	880 in-lbs	X	X	X	X	X	
33H	1,770 in-lbs	X	X	X	X	X	
42H	3,540 in-lbs	X	X	X	X	X	
43H	5,310 in-lbs	X	X	X	X	X	
44H	7,080 in-lbs	X	X	X	X	X	
45H	8,850 in-lbs		X	X	X	X	
46H	15,040 in-lbs			X	X	X	
47H	20,350 in-lbs			X	X	X	
52H	30,970 in-lbs			X	X		X
53H	44,250 in-lbs			X	X		X
62H	70,800 in-lbs			X	X		X
72H	115,000 in-lbs				X		X
73H	140,000 in-lbs				X		X
74H	177,000 in-lbs				X		X

ME15 Technical Data

Exploded View, Materials of Construction, & Dimensional Data

ME15 Series On/Off/Proportional



Overview

The ME15 Series are quarter-turn electric industrial service actuators delivering up to 266 in-lb torque in voltages ranging from 24v up through 230v in on/off or proportional control modes. Other Key Features include:

- Equipped with two (2) volt-free Form A Auxiliary switches rated at up to 1A 250vac (on/off models only)
- Proportional models have 4-20mA or 2-10vdc feedback output standard
- ISO5211 compliant with an 11mm double square female drive
- Furnished with a 39" (1M) cable to facilitate field connections outside the compact enclosure
- Low profile visual position indicator and three flush mounted LEDs allow at-a-glance position indication
- Manual override lever and 5mm access shaft at the bottom of the actuator housing
- NEMA 4/4X & IP67 compliant
- PG6 EMT entry port with sealed cable gland

SPECIFICATIONS

		ME15
Supply	Torque Output (in-lb / Nm)	266 / 30
24VAC - 24VDC	Current Draw (Start / Run / LRA)	1.3A / 0.7A / 2.0A
	Speed (90°) DC-60Hz / 50Hz, seconds	11 / 11
	Motor - 24V DC Perm Magnet 2 Pole Brush	10W
	On/Off / Proportional	Duty Cycle (IEC60034) 75% (S2-15 min) / 75% (S4-75%)
		Motor Protection, Temp / Class All - 130°C / Class B
		Motor Starts, per hour, Max All - 600
120VAC	Current Draw (Start / Run / LRA)	1.3A / 0.7A / 2.0A
	Speed (90°) 60Hz / 50Hz, seconds	11 / 11
	Motor - 24V DC Perm Magnet 2 Pole Brush	10W
	On/Off / Proportional	Duty Cycle (IEC60034) 25% (S2-15 min) / 75% (S4-75%)
		Motor Protection, Temp / Class All - 130°C / Class B
		Motor Starts, per hour, Max All - 600
230VAC	Current Draw (Start / Run / LRA)	1.3A / 0.7A / 2.0A
	Speed (90°) 60Hz / 50Hz, seconds	11 / 11
	Motor - 24V DC Perm Magnet 2 Pole Brush	10W
	On/Off / Proportional	Duty Cycle (IEC60034) 25% (S2-15 min) / 75% (S4-75%)
		Motor Protection, Temp / Class All - 130°C / Class B
		Motor Starts, per hour, Max All - 600
All	Manual Override	Bottom 5mm Hex Shaft
	Environmental Rating	NEMA 4/4X & IP67
	Electrical Entry (1)	1M cable thru PG6 Polyamide gland
	Control	On/Off / Proportional
	Position Feedback - On/Off ONLY	(2) Form A Volt-Free, Rated 1A @ 250vac
	Position Feedback - Proportional ONLY	4-20mA / 2-10vdc
	Ambient Operating Range	-22°F to +158°F (-30°C to +70°C)
	Humidity Range	0-95% RH
	Altitude Limit	9850 ft / 3000 m


ME Series Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions




maxairtech.com

ME15

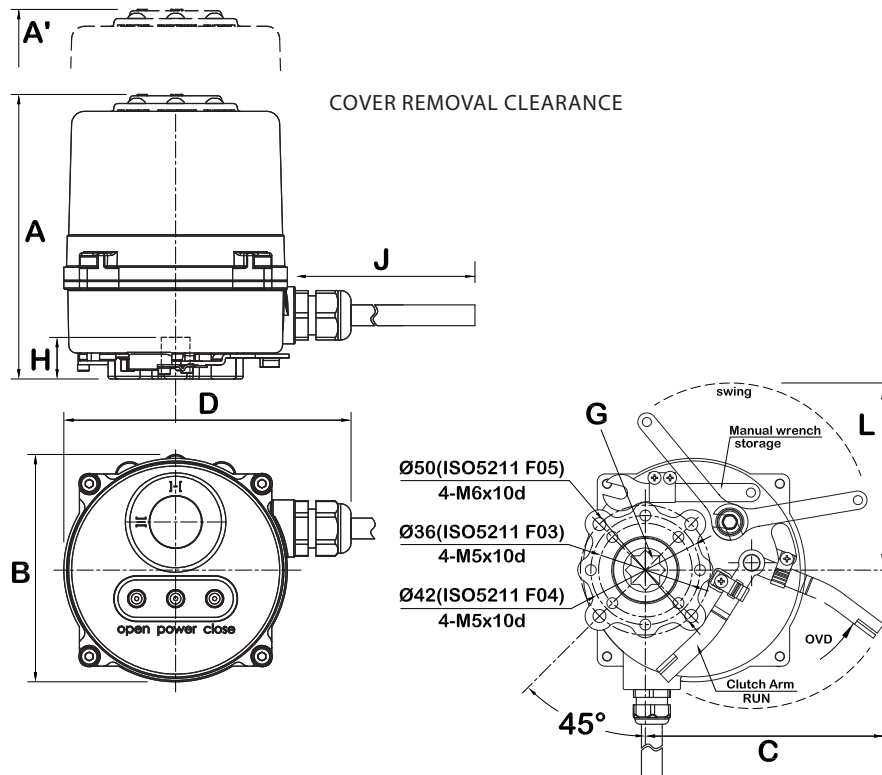


MODEL	A in/mm	A' in/mm	B in/mm	C in/mm	D in/mm	G in/mm	H in/mm	J in/mm	L	WEIGHT lbs/kg
ME15	4.33 / 110	2.95 / 75	3.44 / 87.5	4.49 / 114	4.35 / 111	.433 / 11	.63 / 16	39.4 / 1000	2.83 / 72 3.5 turns 90°	2.2 / 1.0

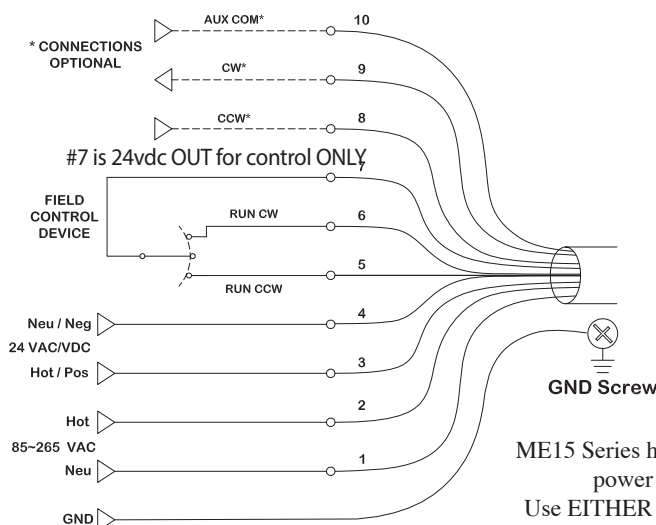

ON/OFF WIRING DIAGRAM

ME15 Series has auto ranging power supply.
Use EITHER 24vac/vdc OR 85~265vac for on/off and proportional control

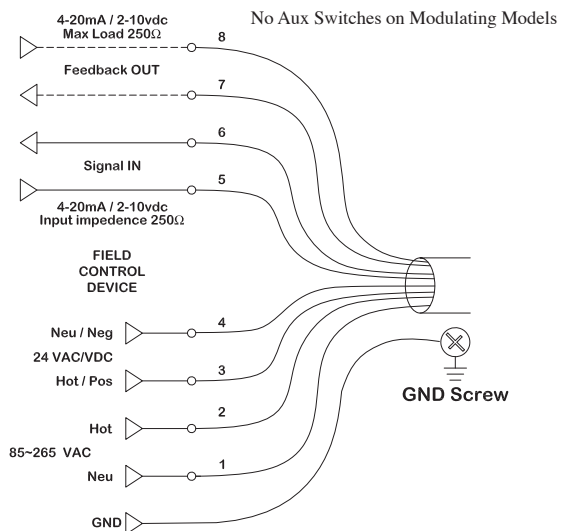

PROPORTIONAL WIRING DIAGRAM

ME22H-ME23H Technical Data

Exploded View, Materials of Construction, & Dimensional Data

ME22H-ME23H Series On/Off/Proportional



Overview

The ME22H-ME23H Series are quarter-turn electric industrial service actuators delivering up to 440 in-lb torque in voltages ranging from 12v up through 230v in on/off or proportional control modes. Other Key Features include:

- Units are equipped with two (2) volt-free Form A Auxiliary switches rated at up to 3A @ 250vac
- ISO5211 compliant with a double square female drive
- Raised visual position indicator
- Manual override hand wheel is available as an option on 2B & 2S models
- Manual override shaft standard
- NEMA 4/4X & IP67 compliant
- Two (2) 1/2" EMT entry ports with sealed cable glands

Options

- Battery Backup
- Supercap Backup
- Local Control Stations
- IP68 Submersion

SPECIFICATIONS

		ME22	ME22H	ME23	ME23H
Supply	Torque Output (in-lb / Nm)	310 / 35	310 / 35	440 / 50	440 / 50
12VAC* - 12VDC*	Current Draw (Start / Run / LRA)	3.5A / 2.0A / 3.8A	3.5A / 2.0A / 3.8A	3.5A / 2.0A / 3.8A	3.5A / 2.0A / 3.8A
	Speed (90°) DC-60Hz/50Hz, seconds	8 / 8	8 / 8	10 / 10	10 / 10
	Motor - 12V DC Perm Magnet 2 Pole Brush	6W	6W	6W	6W
	On/Off / Proportional	Duty Cycle (IEC60034) 75% (S2-15 min) / 75% (S4-75%) Motor Protection, Temp All - 130°C / Class B Motor Starts, per hour, All - 600			
24VAC - 24VDC	Current Draw (Start / Run / LRA)	2.1A / 1.2A / 2.3A	2.1A / 1.2A / 2.3A	2.1A / 1.2A / 2.3A	2.1A / 1.2A / 2.3A
	Speed (90°) DC-60Hz/50Hz, seconds	8 / 8	8 / 8	10 / 10	10 / 10
	Motor - 24V DC Perm Magnet 2 Pole Brush	6W	6W	6W	6W
	On/Off / Proportional	Duty Cycle (IEC60034) 75% (S2-15 min) / 75% (S4-75%) Motor Protection, Temp All - 130°C / Class B Motor Starts, per hour, All - 600			
120VAC	Current Draw (Start / Run / LRA)	0.4A / 0.4A / 0.5A	0.4A / 0.4A / 0.5A	0.4A / 0.4A / 0.5A	0.4A / 0.4A / 0.5A
	Speed (90°) 60Hz / 50Hz, seconds	9 / 11	9 / 11	13 / 15	13 / 15
	Motor - 120V Capacitor Run TENV	10W	10W	10W	10W
	On/Off - Std Duty / On/Off - Ext Duty & Proportional	Duty Cycle (IEC60034) 25% (S2-15 min) / 75% (S4-75%) Motor Protection, Temp 155°C / Class F / 180°C / Class H Motor Starts, per hour, 600 / 1200			
230VAC	Current Draw (Start / Run / LRA)	0.2A / 0.2A / 0.3A	0.2A / 0.2A / 0.3A	0.2A / 0.2A / 0.3A	0.2A / 0.2A / 0.3A
	Speed (90°) 60Hz / 50Hz, seconds	9 / 11	9 / 11	13 / 15	13 / 15
	Motor - 230V Capacitor Run TENV	10W	10W	10W	10W
	On/Off - Std Duty / On/Off - Ext Duty & Proportional	Duty Cycle (IEC60034) 25% (S2-15 min) / 75% (S4-75%) Motor Protection, Temp 155°C / Class F / 180°C / Class H Motor Starts, per hour, 600 / 1200			
All	Manual Override	Bottom 8mm Hex	Hand Wheel	Bottom 8mm Hex	Hand Wheel
	Environmental Rating	NEMA 4/4X & IP67			
	Electrical Entry (2)	1/2" EMT or Polyamide gland			
	Control	On/Off, Proportional, 2 Pos RO, RC & 3 Position			
	Auxiliary Switch - End of Travel	(2) Form A Volt-Free, Rated 3A @ 250vac			
	Ambient Operating Range	-22°F to +158°F (-30°C to +70°C)			
	Humidity Range	0-95% RH			
	Altitude Limit	9850 ft / 3000 m			


*12V versions available custom order.

ME Series Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions




maxairtech.com

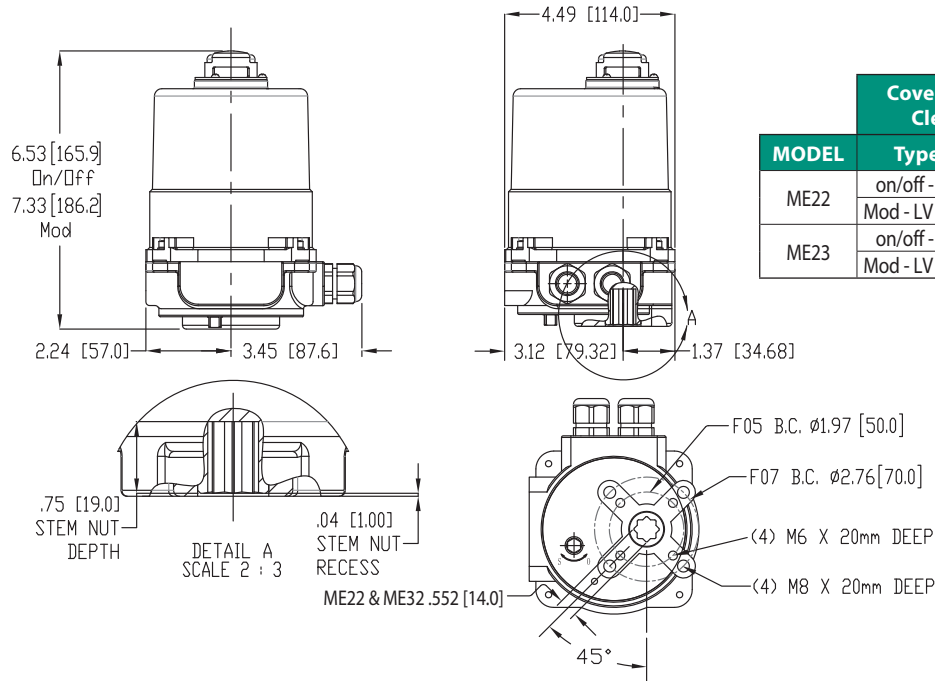

ME22 - ME23

MODEL	Type	Cover Removal Clearance		Override		Weight
		in/mm	mm	# turns for 90°	lbs/kg	
ME22	on/off - All	4.93 / 125	8mm hex	Approximately 7.5 turns 90°	6.6 / 3.0	8.8 / 4.0
	Mod - LV / HV				8.8 / 4.0	
ME23	on/off - All	4.93 / 125	8mm hex	Approximately 7.5 turns 90°	6.6 / 3.0	8.8 / 4.0
	Mod - LV / HV				8.8 / 4.0	

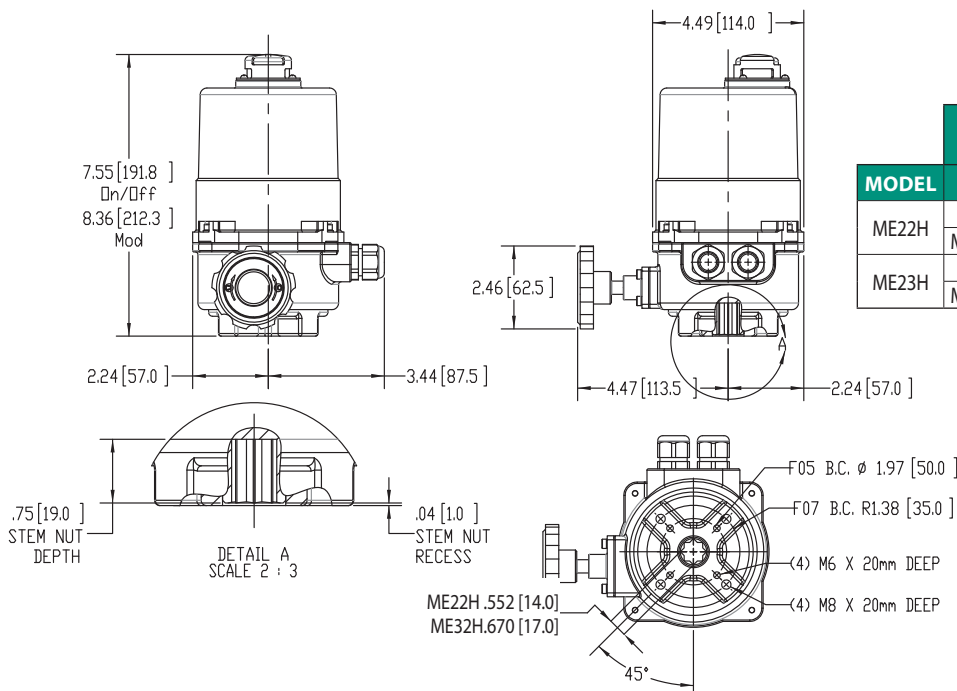

ME22H - ME23H

MODEL	Type	Cover Removal Clearance		Override		Weight
		in/mm	in/mm	# turns for 90°	lbs/kg	
ME22H	on/off - All	4.93 / 125	2.46 / 62.5	12 turns 90°	7.0 / 3.2	9.2 / 4.2
	Mod - LV / HV				9.2 / 4.2	
ME23H	on/off - All	4.93 / 125	2.46 / 62.5	12 turns 90°	7.0 / 3.2	9.2 / 4.2
	Mod - LV / HV				9.2 / 4.2	

ME32H-ME33H Technical Data

Exploded View, Materials of Construction, & Dimensional Data

ME32H-ME33H Series On/Off/Proportional



Overview

The ME32H-ME33H Series are quarter-turn electric industrial service actuators delivering up to 1770 in-lb torque in voltages ranging from 12V up through 230V in on/off or proportional control modes. Other Key Features include:

- Units are equipped with two (2) volt-free Form A Auxiliary switches rated at up to 10A @ 250vac
- ISO5211 compliant mounting with double square female drive inserts
- Raised visual position indicator
- Clutch-free manual override handwheel standard
- NEMA 4/4X & IP67 compliant
- Two (2) 3/4" EMT entry ports with sealed cable glands

Options

- Torque Switches
- Motor Control Centers
- Local Control Stations
- IP68 Submersion
- Battery Backup
- Interchangeable ISO5211 Flange & Drives

SPECIFICATIONS

		ME32H	ME33H
Supply	Torque Output (in-lb / Nm)	880 / 100	1770 / 200
12VAC* - 12VDC*	Current Draw (Start / Run / LRA)	7.2A / 5.2A / 17.8A	7.2A / 5.2A / 17.8A
	Speed (90°) DC-60Hz/50Hz, seconds	14 / 14	28 / 28
	Motor - 12V DC Perm Magnet 2 Pole Brush	25W	25W
	On/Off / Proportional	Duty Cycle (IEC60034) 75% (S2-15 min) / 75% (S4-75%)	
		Motor Protection, Temp All - 130°C / Class B	
24VAC - 24VDC	Current Draw (Start / Run / LRA)	4.2A / 3.2A / 11.0A	4.2A / 3.2A / 11.0A
	Speed (90°) DC-60Hz/50Hz, seconds	14 / 14	28 / 28
	Motor - 24V DC Perm Magnet 2 Pole Brush	25W	25W
	On/Off / Proportional	Duty Cycle (IEC60034) 75% (S2-15 min) / 75% (S4-75%)	
		Motor Protection, Temp All - 130°C / Class B	
120VAC	Current Draw (Start / Run / LRA)	1.2A / 0.9A / 1.5A	1.2A / 0.9A / 1.5A
	Speed (90°) 60Hz / 50Hz, seconds	16 / 19	33 / 39
	Motor - 120V Capacitor Run TENV	40W	40W
	On/Off - Std Duty / On/Off - Ext Duty & Proportional	Duty Cycle (IEC60034) 25% (S2-15 min) / 75% (S4-75%)	
		Motor Protection, Temp 155°C / Class F / 180°C / Class H	
230VAC	Current Draw (Start / Run / LRA)	0.5A / 0.4A / 0.7A	0.5A / 0.4A / 0.7A
	Speed (90°) 60Hz / 50Hz, seconds	16 / 19	33 / 39
	Motor - 230V Capacitor Run TENV	40W	40W
	On/Off - Std Duty / On/Off - Ext Duty & Proportional	Duty Cycle (IEC60034) 25% (S2-15 min) / 75% (S4-75%)	
		Motor Protection, Temp 155°C / Class F / 180°C / Class H	
All	Environmental Rating	NEMA 4/4X & IP67	
	Electrical Entry (2)	3/4" EMT or Polyamide gland	
	Control	On/Off, Proportional, 2 Pos RO, RC & 3 Position	
	Auxiliary Switch - End of Travel	(2) Form A Volt-Free, Rated 10A @ 250vac	
	Ambient Operating Range	-22°F to +158°F (-30°C to +70°C)	
	Humidity Range	0-95% RH	
	Altitude Limit	9850 ft / 3000 m	


ME Series Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions



maxairtech.com

ME32H - ME33H

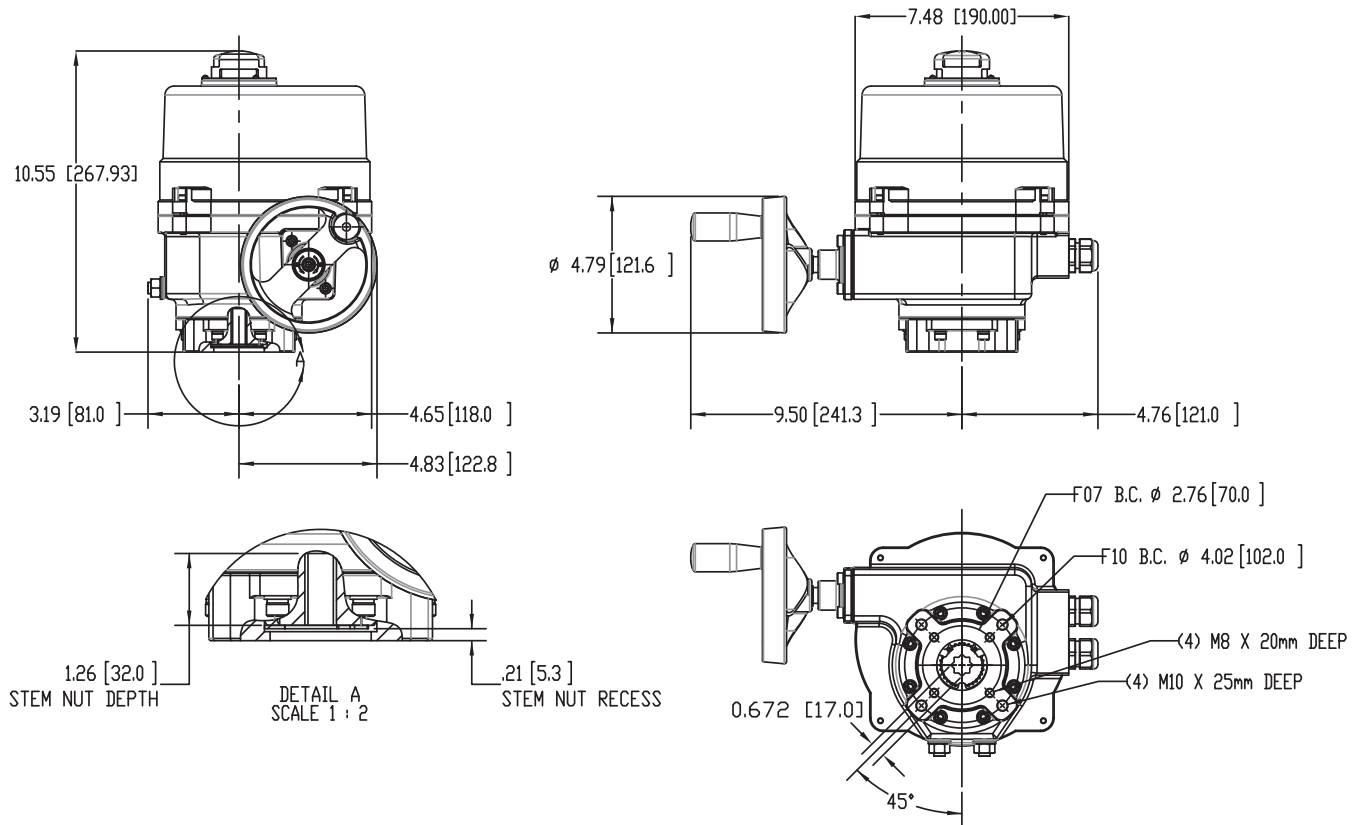

	Cover Removal Clearance		Handwheel		Weight
MODEL	in/mm	in/mm	# turns for 90°		lbs/kg
ME32H	8 / 200	4.79 / 122	12.5 turns 90°		28.6 / 13
ME33H	8 / 200	4.79 / 122	12.5 turns 90°		28.6 / 13

ME32H-ME33H Technical Data

Exploded View, Materials of Construction, & Dimensional Data

ME32H-ME33H Series 3 Phase On/Off - Basic



Overview

The ME32H-ME33H Series are quarter-turn electric industrial service actuators delivering up to 1770 in-lb torque in voltages ranging from 220/3 up through 575/3 in basic (On/Off mode only). Other Key Features include:

- Units are equipped with two (2) volt-free Form A Auxiliary switches rated at up to 10A @ 250vac
- ISO5211 compliant mounting with double square female drive inserts
- Raised visual position indicator
- Clutch-free manual override handwheel standard
- NEMA 4/4X & IP67 compliant
- Two (2) 3/4" EMT entry ports with sealed cable glands

Options

- Torque Switches
- IP68 Submersion
- Interchangeable ISO5211 Flange & Drives

SPECIFICATIONS

		ME32H	ME33H
Supply	Torque Output (in-lb / Nm)	880 / 100	1770 / 200
220/3ph	Current Draw (Start / Run / LRA)	0.7A / 0.6A / 1.0A	0.7A / 0.6A / 1.0A
	Speed (90°) 60Hz / 50Hz, seconds	16 / 19	33 / 39
	Motor - 220V polyphase TENV	40W	40W
	On/Off - Basic	Duty Cycle (IEC60034)	25% (S2-15 min)
		Motor Protection, Temp	155°C / Class F
		Motor Starts, per hour,	600
380/3ph	Current Draw (Start / Run / LRA)	0.4A / 0.3A / 0.6A	0.4A / 0.3A / 0.6A
	Speed (90°) 60Hz / 50Hz, seconds	16 / 19	33 / 39
	Motor - 380V polyphase TENV	40W	40W
	On/Off - Basic	Duty Cycle (IEC60034)	25% (S2-15 min)
		Motor Protection, Temp	155°C / Class F
		Motor Starts, per hour,	600
480/3ph	Current Draw (Start / Run / LRA)	0.2A / 0.2A / 0.4A	0.2A / 0.2A / 0.4A
	Speed (90°) 60Hz / 50Hz, seconds	16 / 19	33 / 39
	Motor - 480V polyphase TENV	40W	40W
	On/Off - Basic	Duty Cycle (IEC60034)	25% (S2-15 min)
		Motor Protection, Temp	155°C / Class F
		Motor Starts, per hour,	600
575/3ph	Current Draw (Start / Run / LRA)	0.2A / 0.2A / 0.3A	0.2A / 0.2A / 0.3A
	Speed (90°) 60Hz / 50Hz, seconds	16 / 19	33 / 39
	Motor - 575V polyphase TENV	40W	40W
	On/Off - Basic	Duty Cycle (IEC60034)	25% (S2-15 min)
		Motor Protection, Temp	155°C / Class F
		Motor Starts, per hour,	600
All	Environmental Rating	NEMA 4/4X & IP67	
	Electrical Entry (2)	3/4" EMT or Polyamide gland	
	Control	On/Off - Basic only	
	Auxiliary Switch - End of Travel	(2) Form A Volt-Free, Rated 10A @ 250vac	
	Ambient Operating Range	-22°F to +158°F (-30°C to +70°C)	
	Humidity Range	0-95% RH	
	Altitude Limit	9850 ft / 3000 m	


ME Series Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions



maxairtech.com

ME32H - ME33H

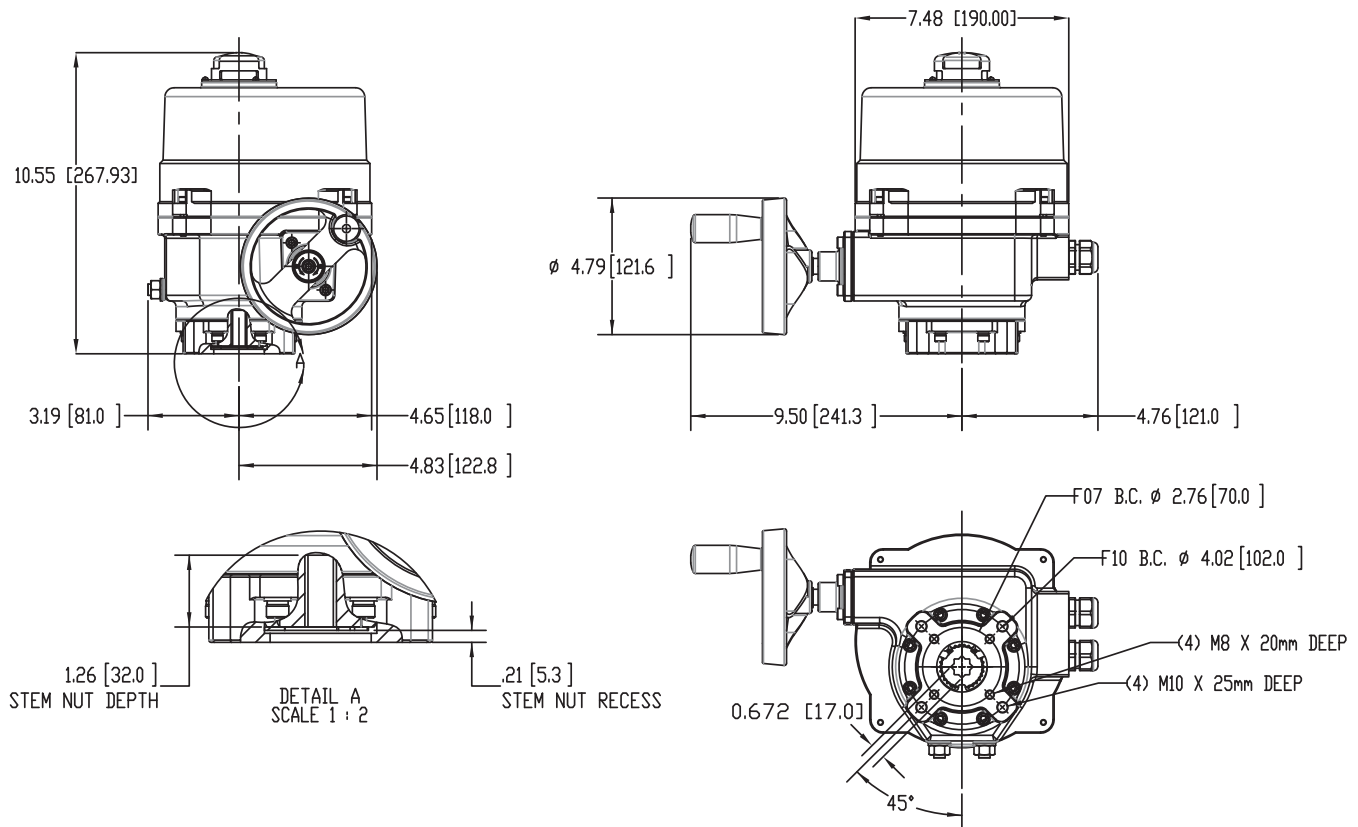

	Cover Removal Clearance	Handwheel		Weight
MODEL	in/mm	in/mm	# turns for 90°	lbs/kg
ME32H	8 / 200	4.79 / 122	12.5 turns 90°	28.6 / 13
ME33H	8 / 200	4.79 / 122	12.5 turns 90°	28.6 / 13

ME32H-ME33H Technical Data

Exploded View, Materials of Construction, & Dimensional Data

ME32H-ME33H Series 3 Phase On/Off/Proportional - MCC



Overview

The ME32H-ME33H Series are quarter-turn electric industrial service actuators delivering up to 1770 in-lb torque in voltages ranging from 220/3 up through 480/3 in on/off or proportional control modes. Other Key Features include:

- Units are equipped with two (2) volt-free Form A Auxiliary switches rated at up to 10A @ 250vac
- ISO5211 compliant mounting with double square female drive inserts
- Raised visual position indicator
- Clutch-free manual override handwheel standard
- NEMA 4/4X & IP67 compliant
- Two (2) 3/4" EMT entry ports with sealed cable glands

Options

- Torque Switches
- Motor Control Centers
- Local Control Stations
- IP68 Submersion
- Interchangeable
ISO5211 Flange & Drives

SPECIFICATIONS

		ME32H	ME33H
Supply*	Torque Output (in-lb / Nm)	880 / 100	1770 / 200
220/3ph	Current Draw (Start / Run / LRA)	0.7A / 0.6A / 1.0A	0.7A / 0.6A / 1.0A
	Speed (90°) 60Hz / 50Hz, seconds	16 / 19	33 / 39
	Motor - 220V polyphase TENV	40W	40W
	On/Off / Proportional	Duty Cycle (IEC60034)	25% (S2-15 min) / 75% (S4-75%)
		Motor Protection, Temp	155°C / Class F
		Motor Starts, per hour,	600
380/3ph	Current Draw (Start / Run / LRA)	0.4A / 0.3A / 0.6A	0.4A / 0.3A / 0.6A
	Speed (90°) 60Hz / 50Hz, seconds	16 / 19	33 / 39
	Motor - 380V polyphase TENV	40W	40W
	On/Off / Proportional	Duty Cycle (IEC60034)	25% (S2-15 min) / 75% (S4-75%)
		Motor Protection, Temp	155°C / Class F
		Motor Starts, per hour,	600
480/3ph	Current Draw (Start / Run / LRA)	0.2A / 0.2A / 0.4A	0.2A / 0.2A / 0.4A
	Speed (90°) 60Hz / 50Hz, seconds	16 / 19	33 / 39
	Motor - 480V polyphase TENV	40W	40W
	On/Off / Proportional	Duty Cycle (IEC60034)	25% (S2-15 min) / 75% (S4-75%)
		Motor Protection, Temp	155°C / Class F
		Motor Starts, per hour,	600
All	Environmental Rating	NEMA 4/4X & IP67	
	Electrical Entry (2)	3/4" EMT or Polyamide gland	
	Control	On/Off, Proportional, in six levels of control and protection (some limited applica-	
	Auxiliary Switch - End of Travel	(2) Form A Volt-Free, Rated 10A @ 250vac	
	Ambient Operating Range	-22°F to +158°F (-30°C to +70°C)	
	Humidity Range	0-95% RH	
	Altitude Limit	9850 ft / 3000 m	


ME Series Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions



maxairtech.com

ME32H - ME33H

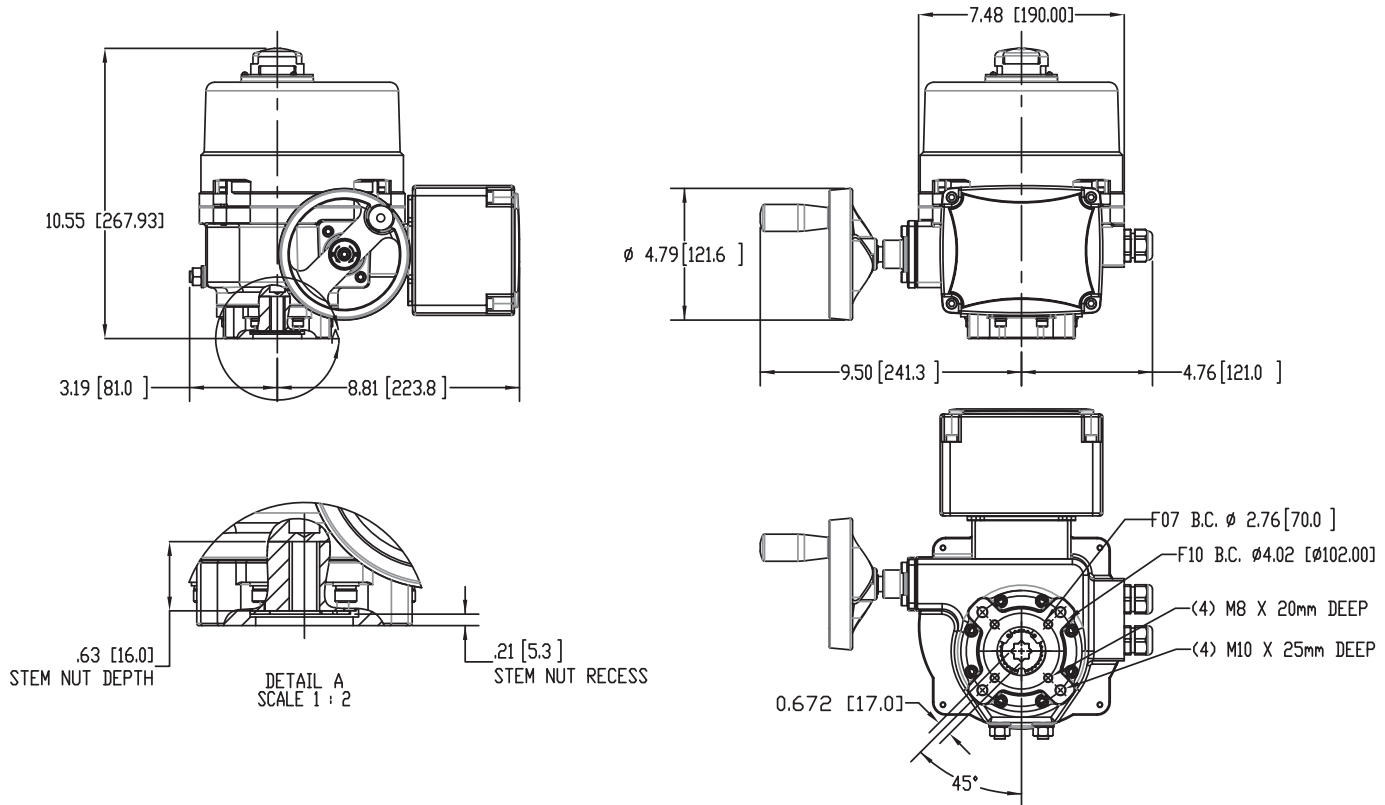

MODEL	Cover Removal Clearance	Handwheel		Weight
	in/mm	in/mm	# turns for 90°	lbs/kg
ME32H	8 / 200	4.79 / 122	12.5 turns 90°	34.1 / 15.5
ME33H	8 / 200	4.79 / 122	12.5 turns 90°	34.1 / 15.5

ME42H-ME47H Technical Data

Exploded View, Materials of Construction, & Dimensional Data

ME42H-ME47H Series On/Off/Proportional



Overview

The ME42H~ME47H Series are quarter-turn electric industrial service actuators delivering up to 20,350 in-lb torque in voltages ranging from 12V up through 230V in on/off or proportional control modes. Other Key Features include:

- Units are equipped with two (2) volt-free Form A Auxiliary switches rated at up to 10A @ 250vac
- ISO5211 compliant mounting with double square female drive inserts
- Raised visual position indicator
- Clutch-free manual override handwheel standard
- NEMA 4/4X & IP67 compliant
- Two (2) 3/4" EMT entry ports with sealed cable glands
- Torque Switches standard ME46H and ME47H

Options

- Torque Switches (ME42H-ME47H)
- Motor Control Centers
- Local Control Stations
- IP68 Submersion
- Battery Backup
- Interchangeable ISO5211 Flange & Drives

SPECIFICATIONS

		ME42H	ME43H	ME44H	ME45H	ME46H	ME47H	
Supply	Torque Output (in-lb / Nm)	3540 / 400	5310 / 600	7080 / 800	8850 / 1000	15,040 / 1700	20,350 / 2300	
12VAC* - 12VDC*	Current Draw (Start / Run / LRA)	11.4A / 9.4A /	11.4A / 9.4A /	11.4A / 9.4A /	-	-	-	
	Speed (90°) DC-60Hz/50Hz, seconds	21 / 21	28 / 28	34 / 34	-	-	-	
	Motor - 12V DC Perm Magnet 2 Pole Brush	40W	40W	40W	-	-	-	
	On/Off / Proportional	Duty Cycle (IEC60034)	75% (S2-15 min) / 75% (S4-75%)			-	-	-
		Motor Protection, Temp / Class	All - 130°C / Class B			-	-	-
	Motor Starts, per hour, Max	All - 600			-	-	-	
24VAC - 24VDC	Current Draw (Start / Run / LRA)	7.0A / 5.8A / 15A	7.0A / 5.8A / 15A	7.0A / 5.8A / 15A	10.5A / 7.8A /	10.5A / 7.8A /	-	
	Speed (90°) DC-60Hz/50Hz, seconds	21 / 21	28 / 28	34 / 34	34 / 34	25 / 25	-	
	Motor - 24V DC Perm Magnet 2 Pole Brush	40W	40W	40W	90W	90W	-	
	On/Off / Proportional	Duty Cycle (IEC60034)	75% (S2-15 min) / 75% (S4-75%)			50% / 50%	-	-
		Motor Protection, Temp / Class	All - 130°C / Class B			-	-	-
	Motor Starts, per hour, Max	All - 600			-	-	-	
120VAC	Current Draw (Start / Run / LRA)	3.0A / 1.8A / 3.5A	3.0A / 1.8A / 3.5A	3.0A / 1.8A / 3.5A	3.8A / 2.3A / 4.8A	7.2A / 4.5A / 9.4A	7.2A / 4.5A / 9.4A	
	Speed (90°) 60Hz / 50Hz, seconds	24 / 29	33 / 39	39 / 47	39 / 47	28 / 34	39 / 47	
	Motor - 120V Capacitor Run TENV	90W	90W	90W	120W	200W	200W	
	On/Off - Std Duty / On/Off - Ext Duty &	Duty Cycle (IEC60034)	25% (S2-15 min) / 75% (S4-75%)			25% (S2-15 min) / 50% (S4-50%)	-	-
		Motor Protection, Temp / Class	155°C / Class F / 180°C / Class H			155°C / Class F / 180°C / Class H	-	-
	Motor Starts, per hour, Max	600 / 1200			600 / 1200	-	-	
230VAC	Current Draw (Start / Run / LRA)	1.7A / 0.9A / 1.9A	1.7A / 0.9A / 1.9A	1.7A / 0.9A / 1.9A	2.2A / 1.1A / 2.4A	4.1A / 2.2A / 4.5A	4.1A / 2.2A / 4.5A	
	Speed (90°) 60Hz / 50Hz, seconds	24 / 29	33 / 39	39 / 47	39 / 47	28 / 34	39 / 47	
	Motor - 230V Capacitor Run TENV	90W	90W	90W	120W	200W	200W	
	On/Off - Std Duty / On/Off - Ext Duty &	Duty Cycle (IEC60034)	25% (S2-15 min) / 75% (S4-75%)			25% (S2-15 min) / 50% (S4-50%)	-	-
		Motor Protection, Temp / Class	155°C / Class F / 180°C / Class H			155°C / Class F / 180°C / Class H	-	-
	Motor Starts, per hour, Max	600 / 1200			600 / 1200	-	-	
	Environmental Rating	NEMA 4/4X & IP67						
	Electrical Entry (2)	3/4" EMT or Polyamide gland						
All	Control	On/Off, Proportional, 2 Pos RO, RC & 3 Position						
	Auxiliary Switch - End of Travel	(2) Form A Volt-Free, Rated 10A @ 250vac						
	Ambient Operating Range	-22°F to +158°F (-30°C to +70°C)						
	Humidity Range	0-95% RH						
	Altitude Limit	9850 ft / 3000 m						

ME Series Technical Brochure


Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions



maxairtech.com


ME42H - ME45H

	Cover Removal	Handwheel		Weight
MODEL	in/mm	in/mm	# turns for 90°	lbs/kg
ME42H	8 / 200	7.76 / 197	14.5 turns 90°	53.9 / 24.5
ME43H	8 / 200	7.76 / 197	14.5 turns 90°	53.9 / 24.5
ME44H	8 / 200	7.76 / 197	14.5 turns 90°	53.9 / 24.5
ME45H	8 / 200	7.76 / 197	14.5 turns 90°	53.9 / 24.5

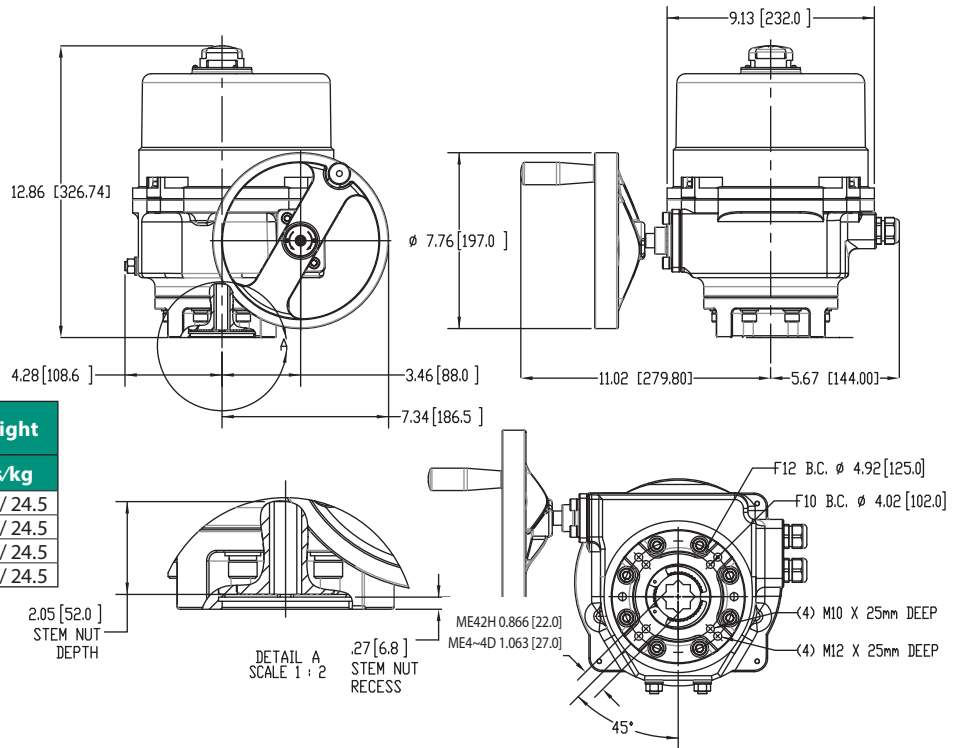

ME46H - ME47H

	Cover Removal	Handwheel		Weight
MODEL	in/mm	in/mm	# turns for 90°	lbs/kg
ME46H	9.84 / 250	11.42 / 290	16 turns 90°	81.4 / 37
ME47H	9.84 / 250	11.42 / 290	16 turns 90°	81.4 / 37

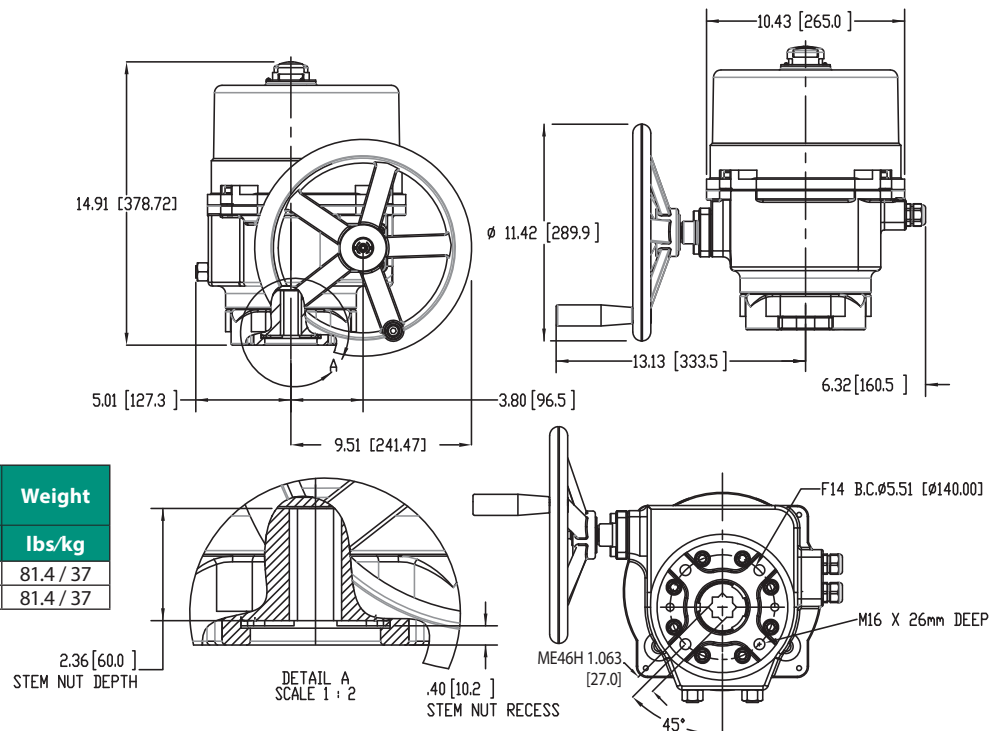

ME42H-ME47H Technical Data

Exploded View, Materials of Construction, & Dimensional Data

ME42H-ME47H Series MCC On/Off/Proportional - Basic



Overview

The ME42H~ME47H Series are quarter-turn electric industrial service actuators delivering up to 20,350 in-lb torque in voltages ranging from 220/3 up through 480/3 in on/off or proportional control modes and 575/3 (basic only). Other Key Features include:

- Units are equipped with two (2) volt-free Form A Auxiliary switches rated at up to 10A @ 250vac
- ISO5211 compliant mounting with double square female drive inserts
- Raised visual position indicator
- Clutch-free manual override handwheel standard
- NEMA 4/4X & IP67 compliant
- Two (2) 3/4" EMT entry ports with sealed cable glands
- Torque Switches standard ME46H and ME47H

Options

- Torque Switches (ME42H~4D)
- Motor Control Centers
- Local Control Stations
- IP68 Submersion
- Interchangeable
ISO5211 Flange & Drives

SPECIFICATIONS

SPECIFICATIONS			ME42H	ME43H	ME44H	ME45H	ME46H	ME47H
Supply*	Torque Output (in-lb / Nm)		3540 / 400	5310 / 600	7080 / 800	8850 / 1000	15,040 / 1700	20,350 / 2300
220/3ph	Current Draw (Start / Run / LRA)		1.8A / 1.1A / 2.4A	1.8A / 1.1A / 2.4A	1.8A / 1.1A / 2.4A	2.8A / 1.1A / 2.1A	3.6A / 1.9A / 4.5A	3.6A / 1.9A / 4.5A
	220V polyphase TENV		90W	90W	90W	120W	200W	200W
380/3ph	Current Draw (Start / Run / LRA)		1.1A / 0.6A / 1.4A	1.1A / 0.6A / 1.4A	1.1A / 0.6A / 1.4A	1.6A / 0.8A / 1.9A	2.1A / 1.1A / 2.6A	2.1A / 1.1A / 2.6A
	Motor - 380V polyphase TENV		90W	90W	90W	120W	200W	200W
480/3ph	Current Draw (Start / Run / LRA)		0.7A / 0.4A / 1.0A	0.7A / 0.4A / 1.0A	0.7A / 0.4A / 1.0A	0.9A / 0.5A / 1.1A	1.2A / 0.9A / 2.1A	1.2A / 0.9A / 2.1A
	Motor - 480V polyphase TENV		90W	90W	90W	120W	200W	200W
575/3ph	575/3 On/Off - Basic Only**		0.4A / 0.3A / 0.8A	0.4A / 0.3A / 0.8A	0.4A / 0.3A / 0.8A	0.8A / 0.4A / 0.9A	1.0A / 0.7A / 1.9A	1.0A / 0.7A / 1.9A
	Current Draw (Start / Run / LRA)							
	Motor - 575V polyphase TENV		90W	90W	90W	120W	200W	200W
All (as noted)	On/Off / Proportional	Duty Cycle (IEC60034)	25% (S2-15 min) / 75% (S4-75%)				25% (S2-15 min) / 50% (S4-50%)	
		Motor Protection, Temp /	155°C / Class F					
		Motor Starts, per hour, Max	600					
	Speed (90°) 60Hz/50Hz, seconds		24 / 29	33 / 39	39 / 47	39 / 47	28 / 34	39 / 47
	Environmental Rating		NEMA 4/4X & IP67					
	Electrical Entry (2)		3/4" EMT or Polyamide Gland					
	Control (220/3 ~ 480/3)		On/Off, Proportional, in six levels of control and protection (some limited applications)					
	Control (575/3)		On/Off - Basic (follow On/Off - Std Duty performance data)					
	Auxiliary Switch - End of Travel		(2) Form A Volt-Free, Rated 10A @ 250vac					
	Ambient Operating Range		-22°F to +158°F (-30°C to +70°C)					
	Humidity Range		0-95% RH					
	Altitude Limit		9850 ft / 3000 m					

ME Series Technical Brochure


Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions



maxairtech.com


ME42H - ME45H

	Cover Removal Clearance	Handwheel		Weight
MODEL	in/mm	in/mm	# turns for 90°	lbs/kg
ME42H	8 / 200	7.76 / 197	14.5 turns 90°	53.9 / 24.5
ME43H	8 / 200	7.76 / 197	14.5 turns 90°	53.9 / 24.5
ME44H	8 / 200	7.76 / 197	14.5 turns 90°	53.9 / 24.5
ME45H	8 / 200	7.76 / 197	14.5 turns 90°	53.9 / 24.5

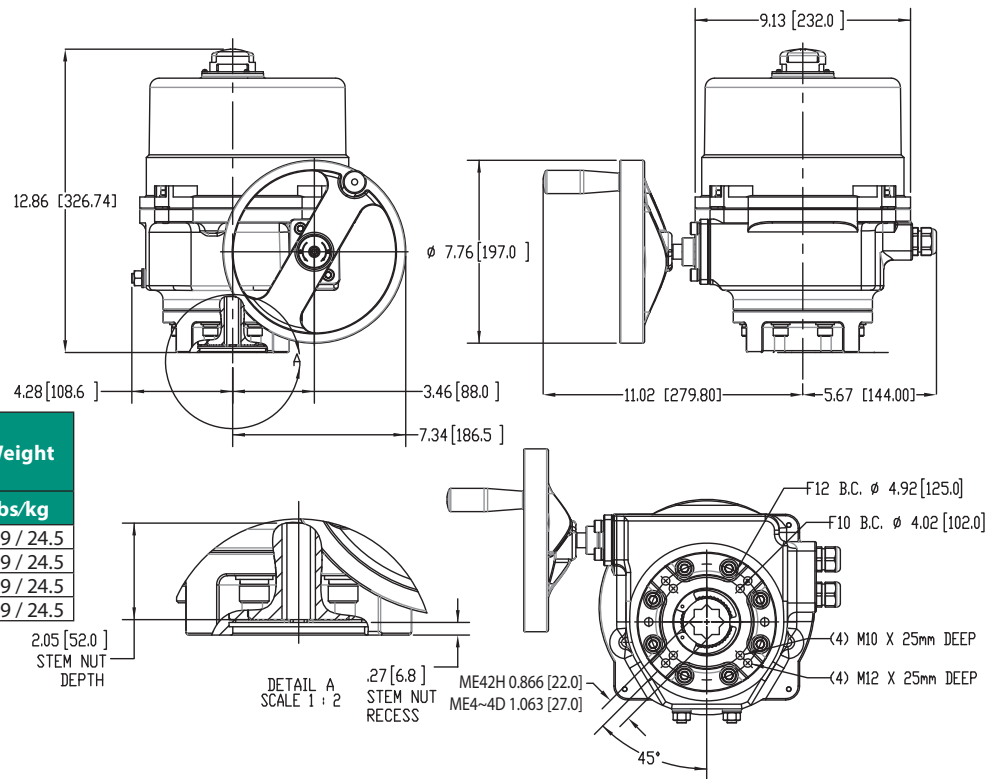

ME46H - ME47H

	Cover Removal Clearance	Handwheel		Weight
MODEL	in/mm	in/mm	# turns for 90°	lbs/kg
ME46H	9.84 / 250	11.42 / 290	16 turns 90°	81.4 / 37
ME47H	9.84 / 250	11.42 / 290	16 turns 90°	81.4 / 37

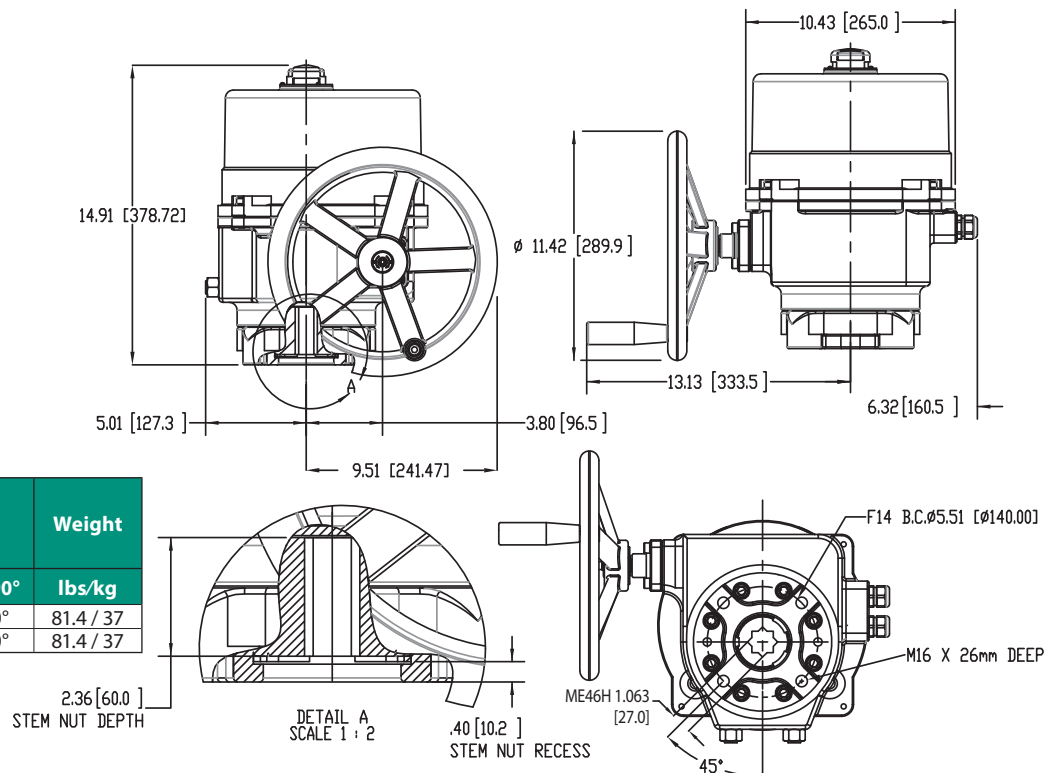

Email: sales@maxairtech.com

[Back to Table of Contents](#)

ME52H-ME53H Technical Data

Exploded View, Materials of Construction, & Dimensional Data

ME52H-ME53H Series On/Off/Proportional - Basic



Overview

The ME5 Series are quarter-turn electric industrial service actuators delivering up to 44,250 in-lb torque in voltages ranging from 120VAC up through 480/3 in on/off or proportional control modes and 575/3 in on/off only. Other Key Features include:

- Units are equipped with two (2) volt-free Form A Auxiliary switches rated at up to 10A @ 250vac
- ISO5211 compliant mounting with a double square female drive
- Flat visual position indicator
- Clutch-free manual override handwheel standard
- NEMA 4/4X & IP67 compliant
- Two (2) 3/4" EMT entry ports with sealed cable glands
- Torque Switches standard

Options

- Motor Control Centers
- Local Control Stations
- IP68 Submersion

SPECIFICATIONS

SPECIFICATIONS			ME52H	ME53H
Supply*	Torque Output (in-lb / Nm)		30,970 / 3500	44,250 / 5000
120VAC	Current Draw (Start / Run / LRA)		7.2A / 4.5A / 9.4A	7.2A / 4.5A / 9.4A
	Motor - 120V Capacitor Run TENV		200W	200W
230VAC	Current Draw (Start / Run / LRA)		4.1A / 2.2A / 4.5A	4.1A / 2.2A / 4.5A
	Motor - 230V Capacitor Run TENV		200W	200W
220/3ph	Current Draw (Start / Run / LRA)		3.6A / 1.9A / 4.5A	3.6A / 1.9A / 4.5A
	Motor - 220V polyphase TENV		200W	200W
380/3ph	Current Draw (Start / Run / LRA)		2.1A / 1.1A / 2.6A	2.1A / 1.1A / 2.6A
	Motor - 380V polyphase TENV		200W	200W
480/3ph	Current Draw (Start / Run / LRA)		1.2A / 0.9A / 2.1A	1.2A / 0.9A / 2.1A
	Motor - 480V polyphase TENV		200W	200W
575/3ph	575/3 On/Off - Basic Only**		1.0A / 0.7A / 1.9A	1.0A / 0.7A / 1.9A
	Current Draw (Start / Run / LRA)			
	Motor - 575V polyphase TENV		200W	200W
All (as noted)	On/Off / Proportional	Duty Cycle (IEC60034)	25% (S2-15 min) / 50% (S4-50%)	
		Motor Protection, Temp / Class	155°C / Class F / 180°C / Class H (Single Phase Only)	
		Motor Starts, per hour, Max	600 / 1200	
	Speed (90°) 60Hz/50Hz, seconds		63 / 76	88 / 105
	Environmental Rating		NEMA 4/4X & IP67	
	Electrical Entry (2)		3/4" EMT or Polyamide Gland	
	Control (120/230VAC)		On/Off, Proportional, 2 Pos RO, RC & 3 Position	
	Control (220/3 ~ 480/3)		On/Off, Proportional, in six levels of control and protection (some	
	Control (575/3)		On/Off - Basic (follow On/Off - Std Duty performance data)	
	Auxiliary Switch - End of Travel		(2) Form A Volt-Free, Rated 10A @ 250vac	
	Ambient Operating Range		-22°F to +158°F (-30°C to +70°C)	
	Humidity Range		0-95% RH	
	Altitude Limit		9850 ft / 3000 m	

*ME52H-ME53H not available below 120vac supply.

*Extended Duty are not available for any 3 Phase actuators.

**Proportional Control motors are not available for 575/3.





ME Series Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions



maxairtech.com

ME52H - ME53H

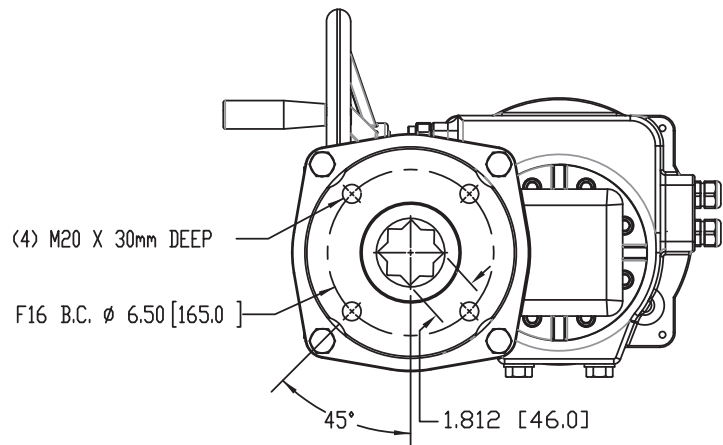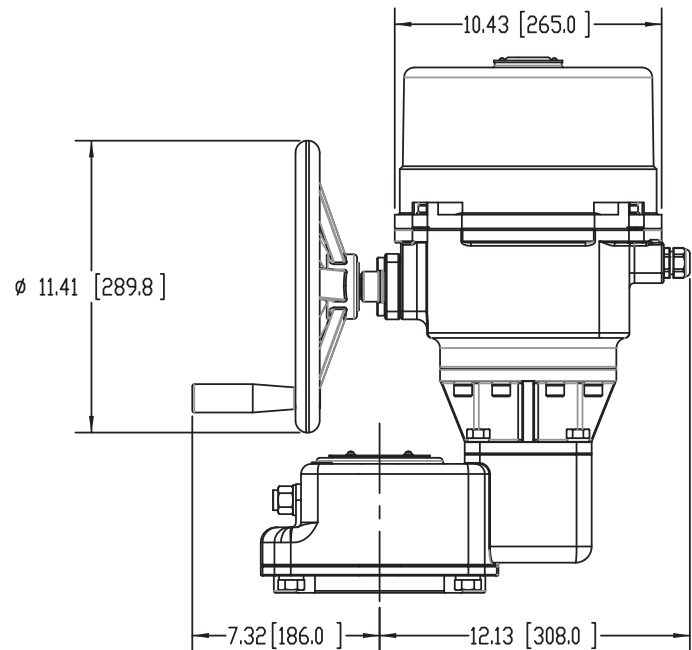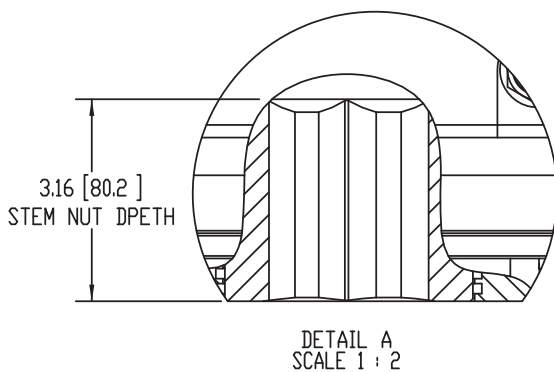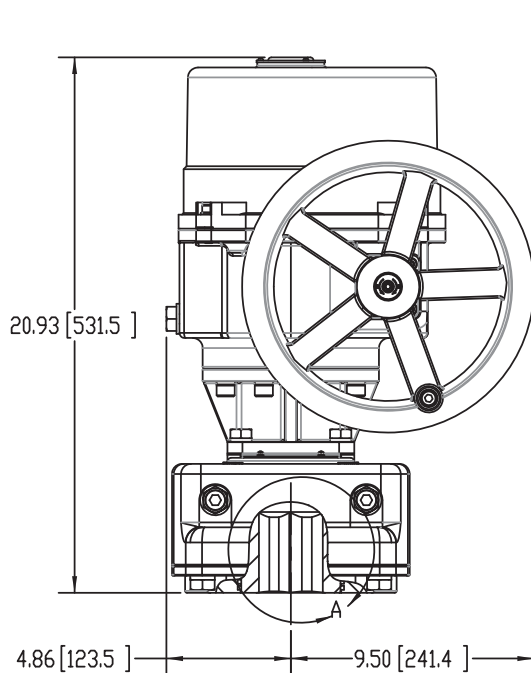

	Cover Removal Clearance		Handwheel		Weight
MODEL	in/mm		in/mm	# turns for 90°	lbs/kg
ME52H	9.84 / 250		11.41 / 290	35.6 turns 90°	174 / 79
ME53H	9.84 / 250		11.41 / 290	35.6 turns 90°	174 / 79

ME62H Technical Data

Exploded View, Materials of Construction, & Dimensional Data

ME62H Series On/Off/Proportional - Basic



Overview

The ME62H Series are quarter-turn electric industrial service actuators delivering up to 70,800 in-lb torque in voltages ranging from 120VAC up through 480/3 in on/off or proportional control modes and 575/3 in on/off only. Other Key Features include:

- Units are equipped with two (2) volt-free Form A Auxiliary switches rated at up to 10A @ 250vac
- ISO5211 compliant mounting with a double square female drive
- Flat visual position indicator
- Clutch-free manual override handwheel standard
- NEMA 4/4X & IP67 compliant
- Two (2) 3/4" EMT entry ports with sealed cable glands
- Torque Switches standard

Options

- Motor Control Centers
- Local Control Stations
- IP68 Submersion

SPECIFICATIONS

			ME62H
Supply*	Torque Output (in-lb / Nm)		70,800 / 8000
120VAC	Current Draw (Start / Run / LRA)		7.2A / 4.5A / 9.4A
	Motor - 120V Capacitor Run TENV		200W
230VAC	Current Draw (Start / Run / LRA)		4.1A / 2.2A / 4.5A
	Motor - 230V Capacitor Run TENV		200W
220/3ph	Current Draw (Start / Run / LRA)		3.6A / 1.9A / 4.5A
	Motor - 220V polyphase TENV		200W
380/3ph	Current Draw (Start / Run / LRA)		2.1A / 1.1A / 2.6A
	Motor - 380V polyphase TENV		200W
480/3ph	Current Draw (Start / Run / LRA)		1.2A / 0.9A / 2.1A
	Motor - 480V polyphase TENV		200W
575/3ph	575/3 On/Off - Basic Only**		1.0A / 0.7A / 1.9A
	Current Draw (Start / Run / LRA)		
	Motor - 575V polyphase TENV		200W
All (as noted)	On/Off / Proportional	Duty Cycle (IEC60034)	25% (S2-15 min) / 50% (S4-50%)
		Motor Protection, Temp / Class	155°C / Class F / 180°C / Class H (Single Phase Only)
		Motor Starts, per hour, Max	600 / 1200
	Speed (90°) 60Hz/50Hz, seconds		119 / 143
	Environmental Rating		NEMA 4/4X & IP67
	Electrical Entry (2)		3/4" EMT or Polyamide Gland
	Control (120/230VAC)		On/Off, Proportional, 2 Pos RO, RC & 3 Position
	Control (220/3 ~ 480/3)		On/Off, Proportional, in six levels of control and protection (some limited)
	Control (575/3)		On/Off - Basic (follow On/Off - Std Duty performance data)
	Auxiliary Switch - End of Travel		(2) Form A Volt-Free, Rated 10A @ 250vac
	Ambient Operating Range		-22°F to +158°F (-30°C to +70°C)
	Humidity Range		0-95% RH
	Altitude Limit		9850 ft / 3000 m

*ME62HA not available below 120vac supply.

*Extended Duty are not available for any 3 Phase actuators.

**Proportional Control motors are not available for 575/3.


ME Series Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions



maxairtech.com

ME62H

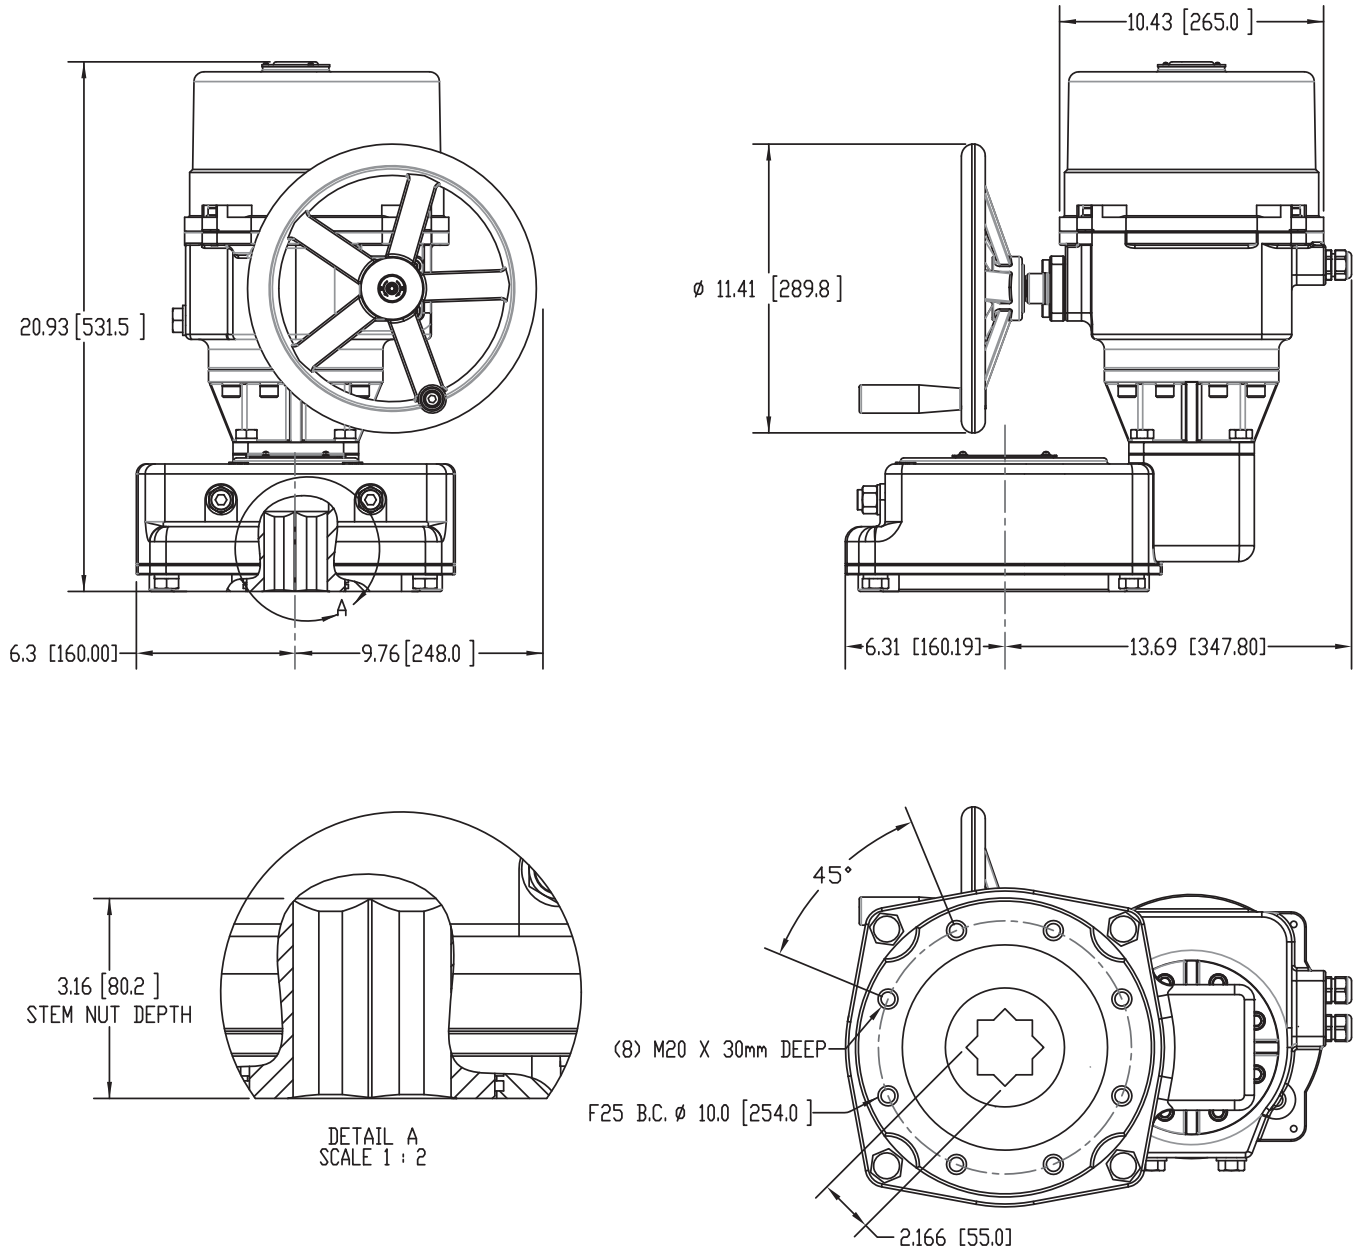

MODEL	Cover Removal	Handwheel		Weight
	in/mm	in/mm	# turns for 90°	lbs/kg
ME62H	9.84 / 250	11.41 / 290	48 turns 90°	242 / 110

Wiring Diagram

On/Off Control & 4-20mA Control

ME Series Wiring Diagrams


APPLIES TO ALL ME15 THRU ME62H

SERIES PRODUCTS


12VAC/DC ~ 230/1 PHASE

Contact Max-Air for 3 phase wiring diagrams

On/Off CONTROL

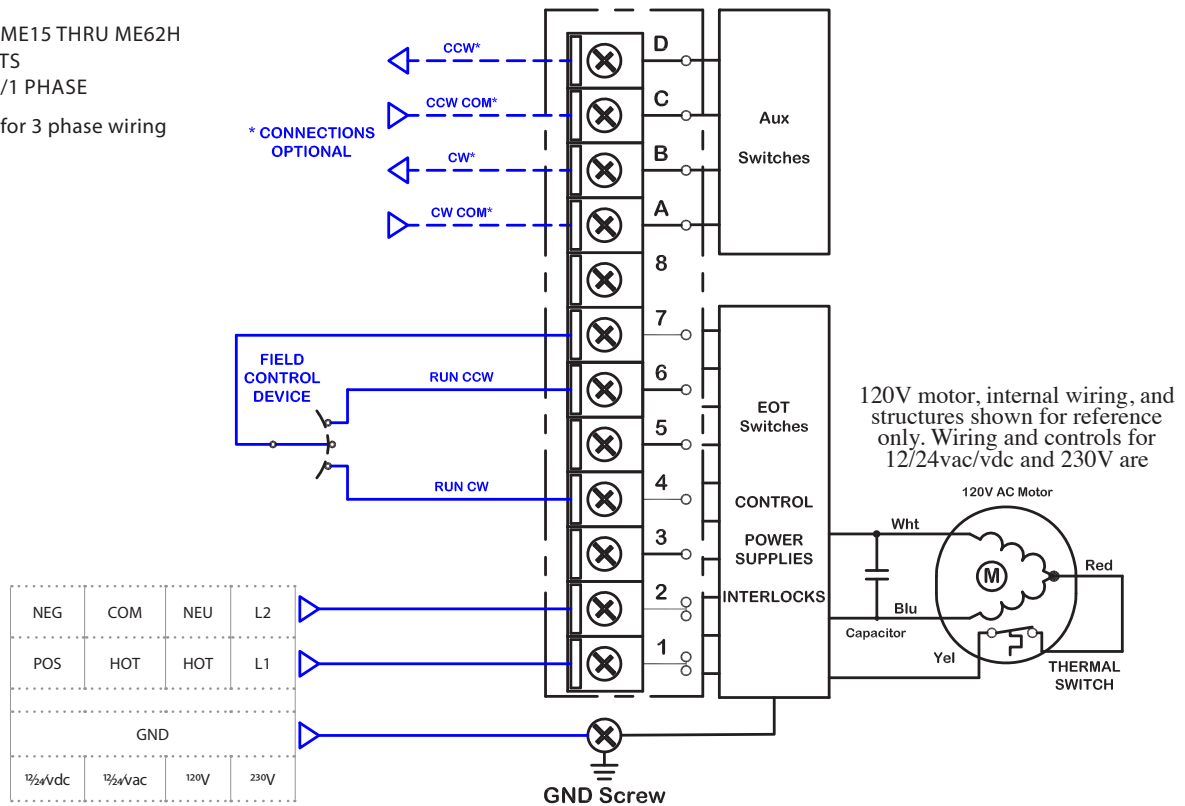

4-20mA CONTROL

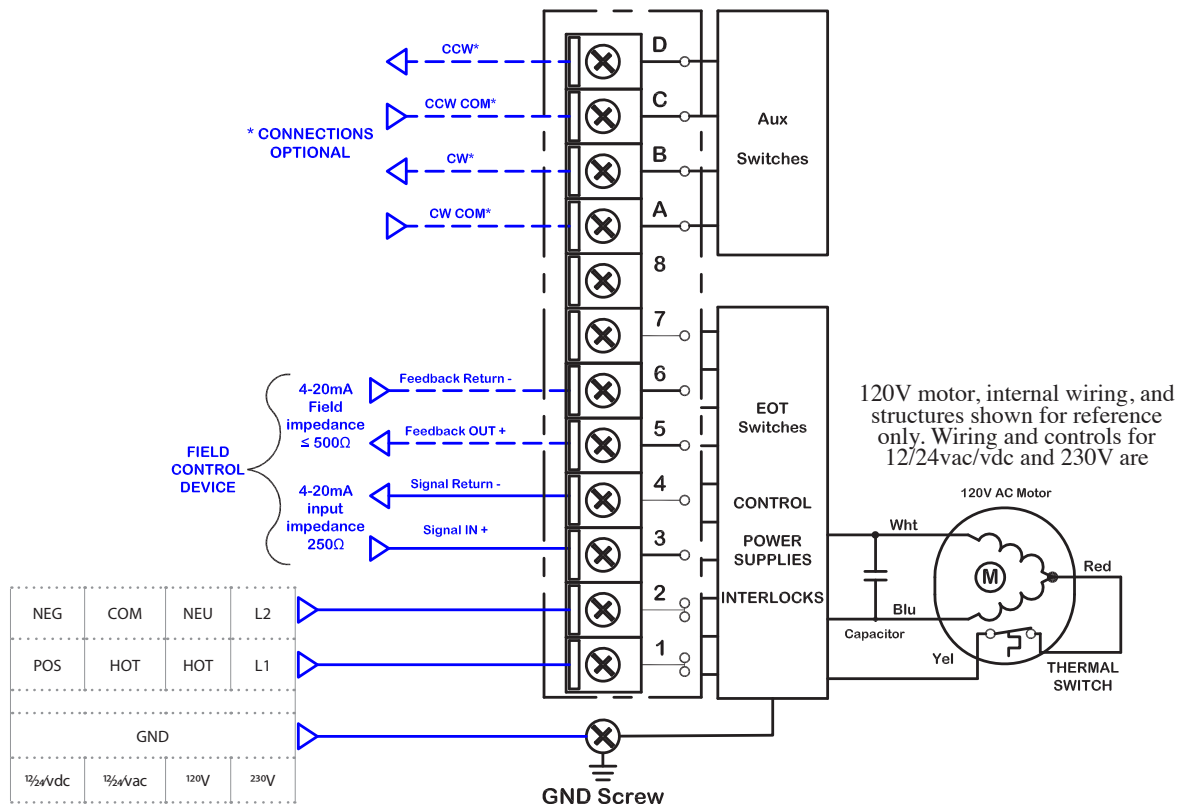

ME Series Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions



maxairtech.com


This page left intentionally blank.

MAX-AIR TECHNOLOGY

The Best Way To Automate Your Process



Your nearest Max-Air dealer can be found at:



Max-Air Technology, Inc. • 114 Resource Drive • Wentzville, MO 63385 • United States of America
Tel +1.636.272.4934 • Toll Free 888.842.9998 • Fax 636.272.4937 • www.maxairtech.com • info@maxairtech.com

© Max-Air Technology, Inc. 2020



R: 04/20/20